

50x100 mm post with reinforced fittings

X-GUARD® - EXTRA STABILITY, 120 MM SAFETY DISTANCE

PRODUCT FACTS

Safety distance	120 mm
Vertical tubes	30x20 mm
Horizontal tubes	25x15 mm
Posts	50x100, 70x70, 100x100 mm
Vertical wires	Ø 3 mm
Horizontal wires	Ø 2.5 mm
Mesh size	cc 51x21 mm
Surface treatment	Phosphating/Epoxy
Color panel	Black RAL 9011
Color post	Yellow RAL 1018


ACCESSORIES

T01-10 Reinforced panelfittings for the 50x100 mm posts.
1 set/panel

The reinforced panelfittings can be used around the whole robotcell or just a part of it where extra stability is necessary.

An example of this could be the operators workstation.

X-GUARD®

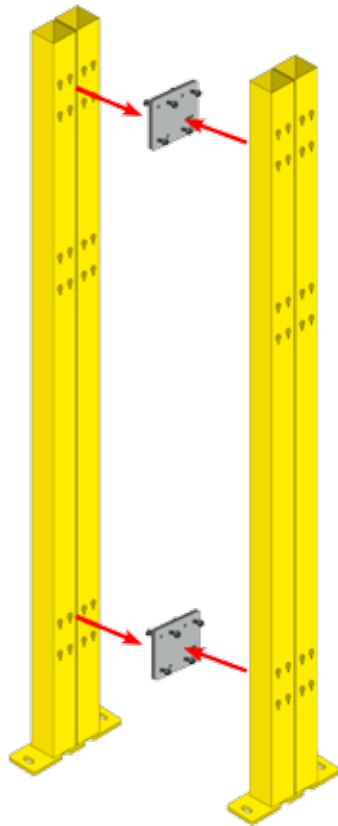

Premium post, 100x100 mm

Our X-Guard Premium post, 100x100 mm, is available in two heights; 2000 and 2300 mm. Floor distance is 100 mm and standardcolor is yellow, RAL 1018. The post consists of two 50x100 mm posts put together and provides extra stability around, for example, corners or doors.

Axelents new X-Guard panel with 50x20 mm mesh is available in widths 250, 400, 700, 1000, 1200 and 1500 mm. Panels are kept in stock unpainted, which means there will be approx. one week deliverytime. There will be no extra charges when choosing standardcolor.

POSTS

Art no.	Floor distance (mm)	Height (mm)
Premium 50x100 mm, Yellow (RAL 1018)		
P12-200	100	2000
P12-230	100	2300
Premium 70x70 mm, Yellow (RAL 1018)		
P13-140	100	1400
P13-200	100	2000
P13-230	100	2300
Premium 100x100 mm, Yellow (RAL 1018)		
P14-200	100	2000
P14-230	100	2300

MESH PANELS

Art no.	Height (mm)	Width (mm)
Black (RAL 9011)		
W321-220025	2200	250
W321-220040	2200	400
W321-220070	2200	700
W321-220100	2200	1000
W321-220120	2200	1200
W321-220150	2200	1500