

# Working with ease...


## Stockmaster - Aluminium Access and Order Picking Platforms

### Stockmaster - Tracker

- Mobile - relocates quickly
- Large Wheels - travels easily over most surfaces
- Tilt and Steer control - minimizes operator effort to move ladder
- Two Handrails - assists safe and easy climbing
- Platform with Safety Railing - provides a secure working position
- Industrial Standard - designed to comply with authority requirements

With both **Tracker** and **Navigator**, weight shift as the operator moves about the platform has no effect on stability. With the control handle actuated, the operator is set back from the ladder, allowing a normal walking gait. An optional tool tray places a toolbox or clipboard at the ideal working height.


When fitted with the **optional Auto-Safe Gate** the operator is totally enclosed within the platform area to provide the safest possible workspace.

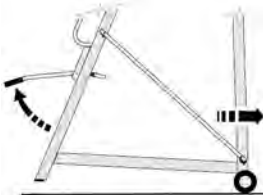

**Actuation of the Tilt/Steer Control raises the ladder to the mobile position and provides easy steering for repositioning.**



Tracker is a great help for safe access during maintenance

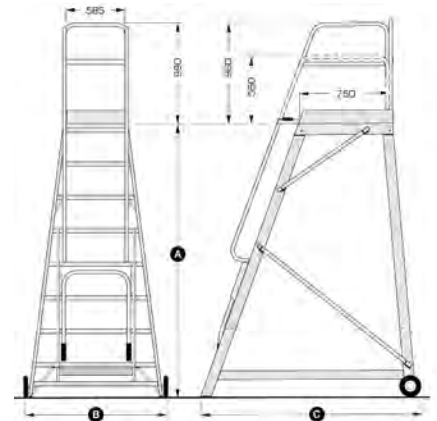

Code	A mm	B mm	C mm
SSMT3	860	840	1225
SSMT4	1145	895	1355
SSMT5	1435	935	1485
SSMT6	1720	975	1615
SSMT7	2005	1015	1745
SSMT8	2295	1055	1875
SSMT9	2580	1095	2005
SSMT10	2865	1135	2135
SSMT11	3155	1175	2265
SSMT12	3440	1215	2395
SSMT13	3725	1255	2525
SSMT14	4015	1295	2655

These platforms are shipped in knocked down condition for economical and easy transport. Optional fold down handrails available.


### Stockmaster - Navigator

- Lift and Steer Control - minimizes operator effort to relocate ladder
- No Springs - eliminates rocking or swaying resulting in a safer ladder
- Four Swivel Castors - relocates quickly and handles tight spaces
- Two Handrails - assists safe and easy climbing
- Can be retrofitted to accommodate manual or electric lift tables.

**Navigator - The original, totally stable mobile platform ladder**

Navigator features an ergonomically designed control handle to raise the ladder to the mobile position and provide easy steering for repositioning. Release of the control handle automatically returns the unit to the default position. In the default position, the ladder is completely stable with all four feet in floor contact.


When fitted with the **optional Auto-Safe Gate** the operator is totally enclosed within the platform area to provide the safest possible workspace.

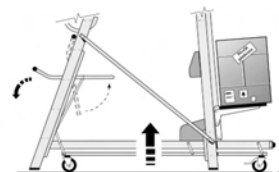

**Navigator with actuated control handle.**



Safe access at height with Navigator. Note the Auto-Safe Gate

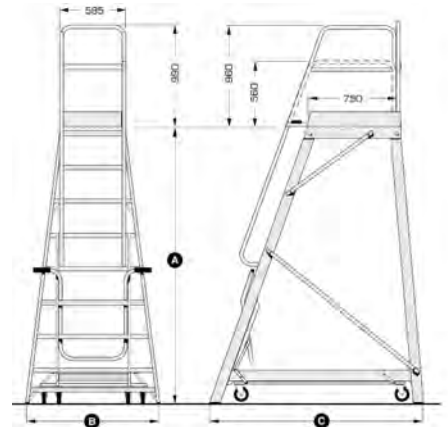

Code	A mm	B mm	C mm
SSMN4	1145	755	1295
SSMN5	1435	795	1425
SSMN6	1720	835	1555
SSMN7	2005	875	1685
SSMN8	2295	915	1815
SSMN9	2580	955	1945
SSMN10	2865	995	2075
SSMN11	3155	1035	2205
SSMN12	3440	1075	2335
SSMN13	3725	1115	2465
SSMN14	4015	1155	2595

These platforms are shipped in knocked down condition for economical and easy transport. Optional fold down handrails available.