


## Safety Drum Faucets

Leakproof dispensing of flammable liquids—internal flame arrester prevents flashback into the drum for added safety

- Brass construction with a polytetrafluoroethylene (PTFE) seal ensures excellent chemical resistance
- Models D08910 and D08916 feature a coupling nut that provides rotation of the spout downward after the faucet is threaded in place
- Use model D08552 for viscous noncorrosive flammables such as adhesives, paint or heavy oils above 2000 SSU (about 30W oil)
- FM-approved

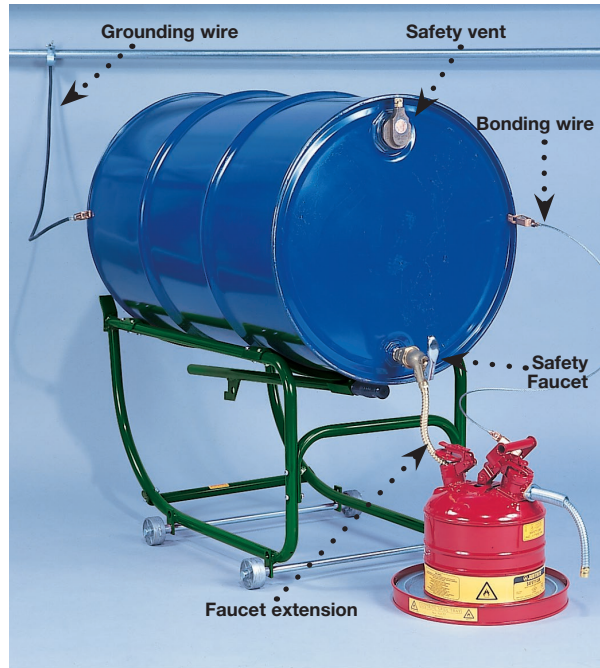

Create a safe dispensing station.



D08587



Description	NPT/NPS	Internal Spout Thread	Approv/Lstg Regulation	Model
Brass drum gate valve, viscous liquids	2 in (DN50)	—	FM	D08552
Brass safety faucet, rigid	0.75 in (DN20)	0.8125 in - 27 UNS 2B		D08902
Brass safety faucet, adjustable				D08910
Brass safety faucet, viscous liquids				D08955
Brass control flow lab safety faucet		0.5 in - 20 UNF		D08540
Stainless steel faucet, adjustable		0.8125 in - 27 UNS 2B		D08916
Flexible faucet extension 3.25 in (83 mm) long, brass for use with D08902, D08910, and D08955			—	D08932
Flexible faucet extension 6 in (152 mm) long, stainless steel for use with D08916				D08587
Flexible faucet extension 6 in (152 mm) long, brass for use with D08540 or D08955				D08584
Flexible faucet extension 8 in (203 mm) long, brass for use with D08902, D08910, and D08955				D08930

## Drum Siphon Adaptor

Safely drain a horizontally-stored drum down to a few ounces to save on costs associated with removal of hazardous liquids

- Solid cast brass adaptor withstands heavy use with compatible liquids
- Adaptor fits into a 0.75-in (19-mm) drum bung and features an adjustable collar to accommodate bungs in various positions for maximum draining
- Use a 0.75-in (19-mm) safety drum faucet for safe, trouble-free dispensing

Description	Model
Brass drum siphon adaptor for 0.75 in NPT/NPS (DN20) bung	D08311
Brass adaptor 08311 and brass self-closing faucet 08902	D08308

