
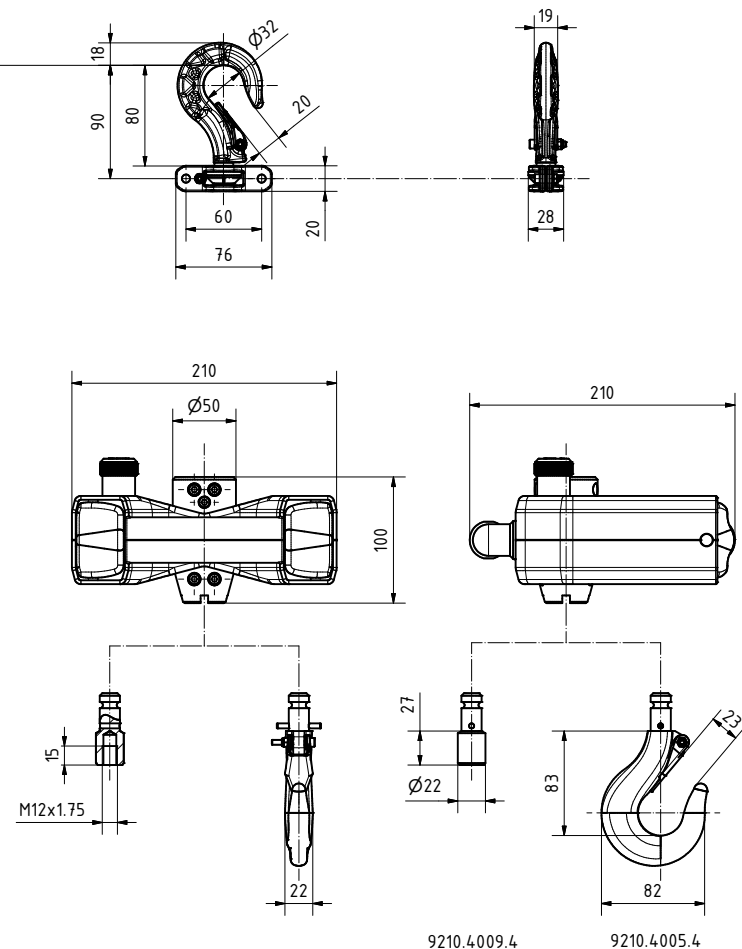
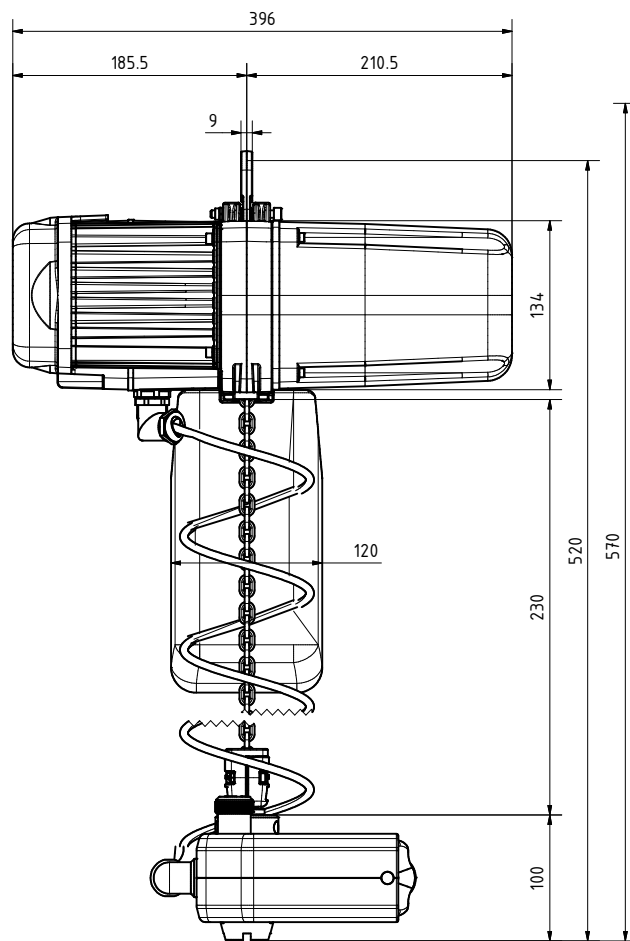


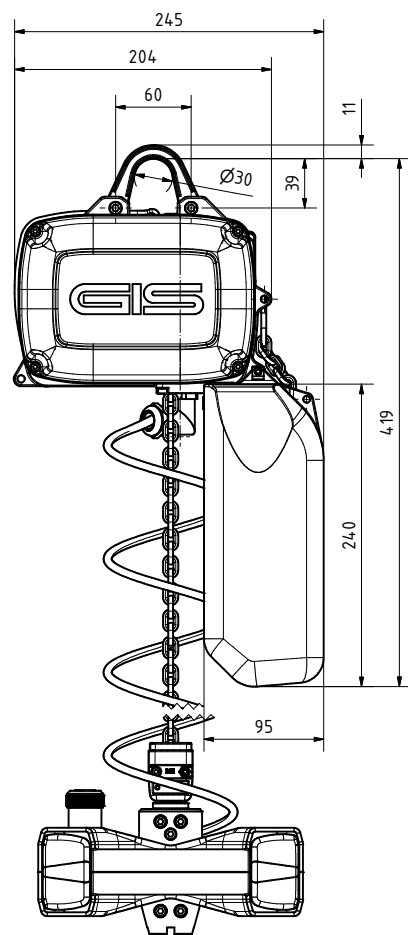

Classification	A5(M5)	A6(M6)	A6(M6)	A6(M6)	A6(M6)							Profil steel chain black phosphated	
Cycles/day	60	120	120	120	120	Lifting speed	Lifting speed	Motor power	3Ph 3x400V 50Hz	Weight with 3m lift	Chain safety static	Grade, according	DAT (8SS), EN 818-7
Duty factor %	(40)	(50)	(50)	(50)	(50)							Chain size	3.75mm x 10.75mm
	kg	kg	kg	kg	kg	m/min. 50Hz	m/min. 60Hz	kW (50 Hz)	A	kg	(A5/M5)	Chain weight / meter	0.34kg
GPMH 250/1NF3	250	200	160	125	100	8 / 2	9.6 / 2.4	0.37 / 0.1	2.0 / 1.2	19	8 : 1	GPMH 250 Schematic drawing  swiss lifting solutions	
GPMH 250/1SF3	125	100	80	-	-	16 / 4	19.2 / 4.8	0.37 / 0.1	2.0 / 1.2	19	8 : 1		
-	-	-	-	-	-	-	-	-	-	-	-		
-	-	-	-	-	-	-	-	-	-	-	-		
												Massstab 1:3 Freigegeben Rev. C 25.06.2021 User P.ENGEL Gezeichnet 03.12.2015 D.PAREKKA. 9500.9211.5 C	

- Protection DIN 40050:
- Insulation class:
- Fuse protection generally:
- Load hook DIN 15401
- Classification according to ISO 4301-1 / FEM

IP65
F
6A
025