

Glass miniLifter GML

fast - compact - safe



GML1 Glass miniLifter

Unique handling solution for quick manipulation of parts with flat surfaces.

Designed for all quick handling processes in glass and window working industry. Ergonomic construction with two control handles on the frame.


One-handed operation with variable speed lifting mechanism. All operating elements are integrated in the compact body.

Technical data

- Safe working load: 100 kg
- Suction cup: Ø 270 mm
- vacuum generation: pneumatically with safety function
- lifting speed: up to 20 m/min
- suction time: approx. 2 sec.
- release time: approx. 1 sec.
- optional: 360° (endless) rotation function



GML2 Glass miniLifter with 360° rotation function

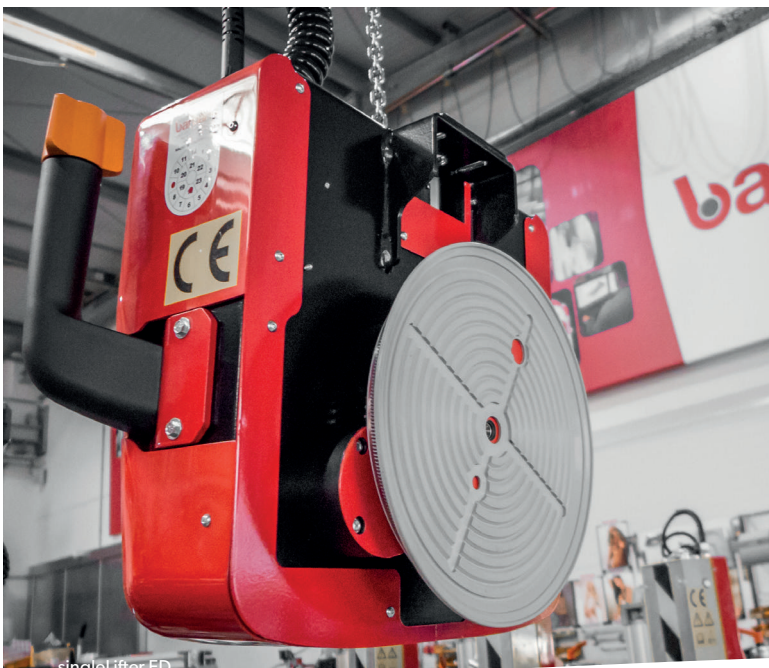

SingleLifter ED

Lightweight materials handling via compact construction and low weight.

High safety standard with pneumatic vacuum generation and secure vacuum release function.

Triple safety factor, overload protection on the chain hoist. Safety alarm and vacuum gauge integrated in the base body.

Optional

- 360° rotation function



LIFTING



ROTATING

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling PTY LTD Working with ease.