



# CABLE DRUM LIFTING BEAM

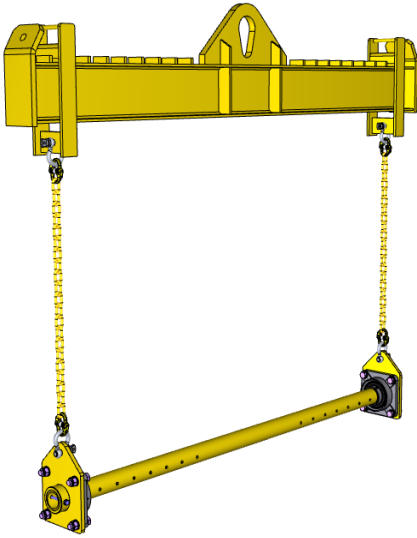


The CDS6X2 Cable Drum Spreader Beam is designed for the safe transport of cable drums and payout during installation. The shaft runs through the centre of the drum and is connected at both ends to a spreader beam via two chains. Fitted with bearings, the cable drum freely rotates for smooth unwinding of cables.

## Features:

- Suits lifting and dispensing of cables from a drum
- Adjustable lift positions to suit varying drum sizes
- Bearings fitted for smooth rotation of cable drums
- Lightweight steel spindle allows easy placement through drum centre
- Can be customised to suit application on request
- Also available in a 2T capacity model
- Enamel paint finish

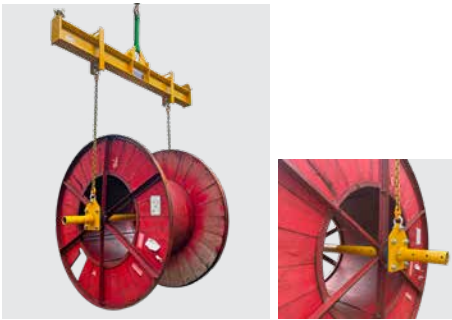

Working Load Limit	6000kg
Drum Width	400-1800mm
Max. Drum Diameter	2500mm
Min. Drum Hole Diameter	80mm
Spindle Weight	21kg
Unit Weight	175kg

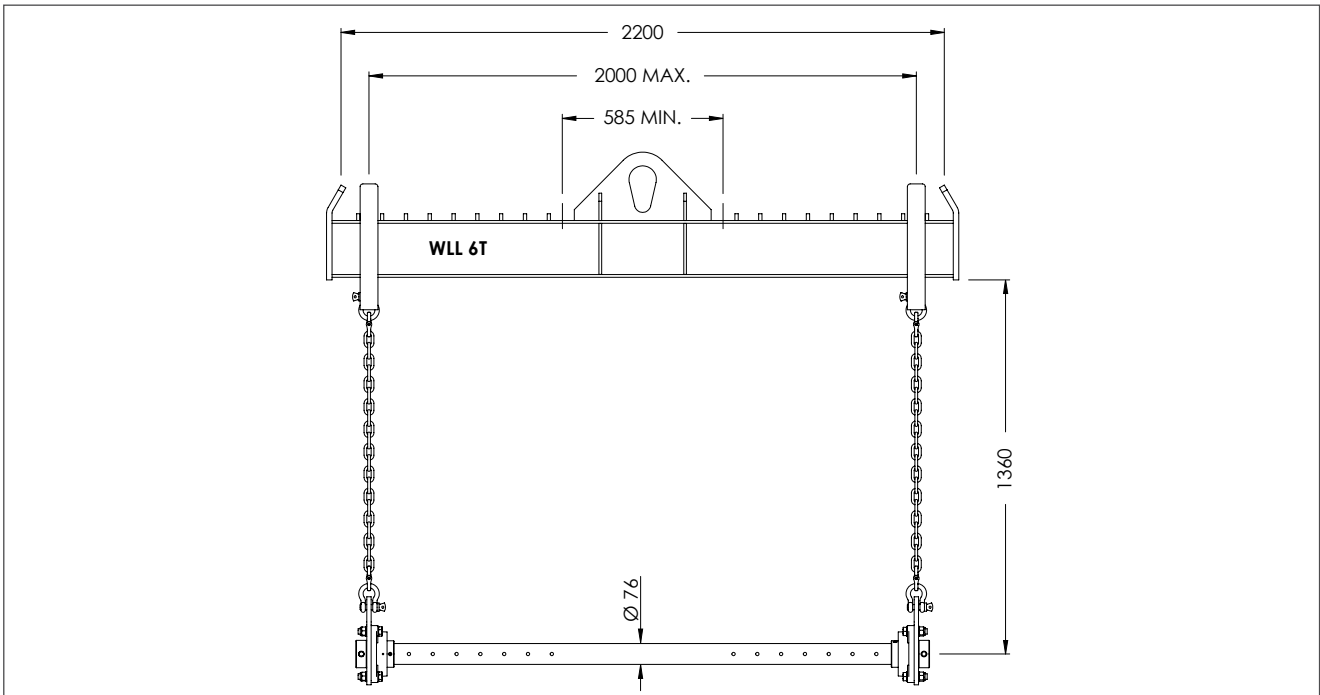

NOTE: 2 leg chain sling not included. Overhead lifting chains shown for illustrative purposes only.

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

**MATERIALS**  
**Handling** *Working with ease*  
PTY LTD