


FORKLIFT SLIPPER TINE EXTENSIONS

MSL SPECIFICATIONS

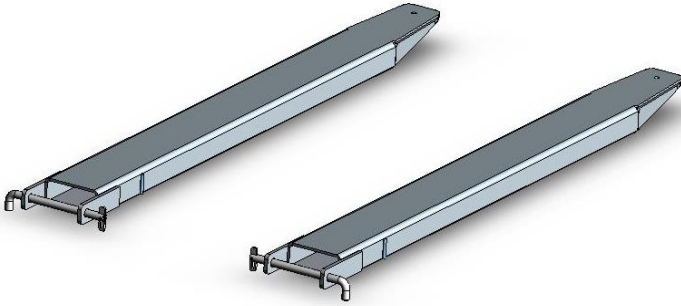


The type MSL Fork Extension Slippers have been designed with a slim profile to extend the versatility of your Lift Truck. These Slippers have been designed and manufactured in accordance with AS2359.15

Slippers used for general usage should be no longer than 167 % of the supporting Tine's length. If the Slippers are longer than 167 %, then the usage of those Slippers shall be restricted to their specified application.

SPECIFICATIONS:

- Supplied with Toggle Locking Pins
- Fitted with Rating Plate
- Supplied with Instructions

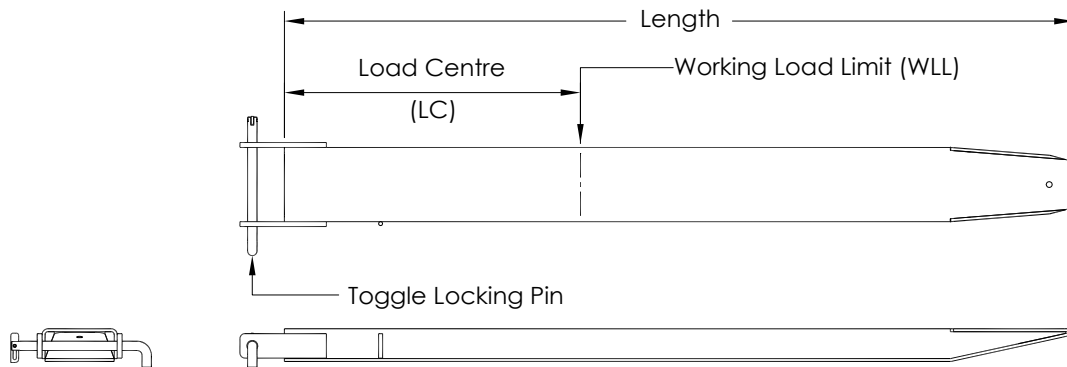

Type	Length (mm)	To Suit Max. Tine Size (mm)	To Suit Min. Tine Length (mm)	Unit Weight per pair (kg)	Horizontal C of G (mm)	Working Load Limit (WLL) per pair @ Load Centre	
						(kg @ mm)	(kg @ mm)
MSL115	1600	100 x 45	960	42	694	2500 @ 500	1560 @ 800
MSL118	1780	100 x 45	1068	46	783	2500 @ 500	1400 @ 890
MSL121	2000	100 x 45	1200	52	893	2500 @ 500	1250 @ 1000
MSL124	2400	100 x 45	1440	61	1092	2500 @ 500	1040 @ 1200
MSL216	1600	130 x 50	960	60	733	4000 @ 500	2500 @ 800
MSL218	1780	130 x 50	1068	66	833	4000 @ 500	2245 @ 890
MSL221	2000	130 x 50	1200	74	915	4000 @ 500	2000 @ 1000
MSL224	2400	130 x 50	1440	88	1132	4000 @ 500	1665 @ 1200
MSL318	1780	155 x 55	1068	77	809	5000 @ 500	2805 @ 890
MSL321	2000	155 x 55	1200	86	919	5000 @ 500	2500 @ 1000
MSL324	2400	155 x 55	1440	102	1118	5000 @ 500	2080 @ 1200
MSL330	3000	155 x 55	1800	126	1418	5000 @ 500	1665 @ 1500
MSL418	1780	160 x 65	1068	133	836	8000 @ 600	5390 @ 890
MSL421	2000	160 x 65	1200	148	922	8000 @ 600	4800 @ 1000
MSL424	2400	160 x 65	1440	177	1136	8000 @ 600	4000 @ 1200
MSL430	3000	160 x 65	1800	221	1436	8000 @ 600	3200 @ 1500

NOTE: When using fork extension slippers all loads should be evenly distributed