


HOPPER BINS SPECIFICATIONS

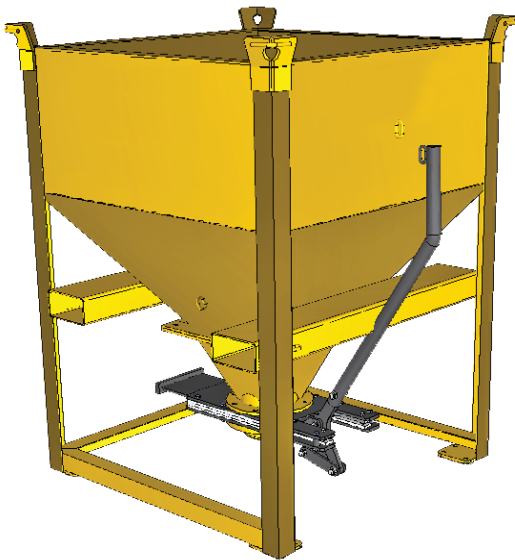


The HBF-SV Hopper Bin is designed for the storage and dispensing of bulk materials with an easy to operate slide valve opening for precise control of material flow.

Features:


- Ideal for handling granular products such as aggregate, sand, cement or grain up to 2T WLL
- 200mm dia slide valve for precise control of material flow
- Crane lugs fitted for transporting fully loaded unit by crane
- Fitted with fork pockets to allow onsite transport by forklift
- Stackable (2 high) in its standard configuration
- Also available with an easy to open and fast acting clamshell gate (HBF) for positive shut-off of material flow
- Enamel paint finish

Optional Accesories:

- Wheel kit (150mm DIA PU/CI castors - swivel with brakes)
- Raised stand (HBF-EF), 750mm standard height or can be custom made to suit requirements
- Layflat hose adaptor 200mm OD (CKSV10-09)
- Bagging head adaptor 220mm OD (SP-0561)
- Reducing funnel to 100mm OD (SP-0562)
- Vacuum adaptor (SP-0563)



Working Load Limit (WLL)	2000kg
Fork Pocket / Stirrup Size	185 x 85mm / 145 x 50mm
Fork Pocket Centres	850mm

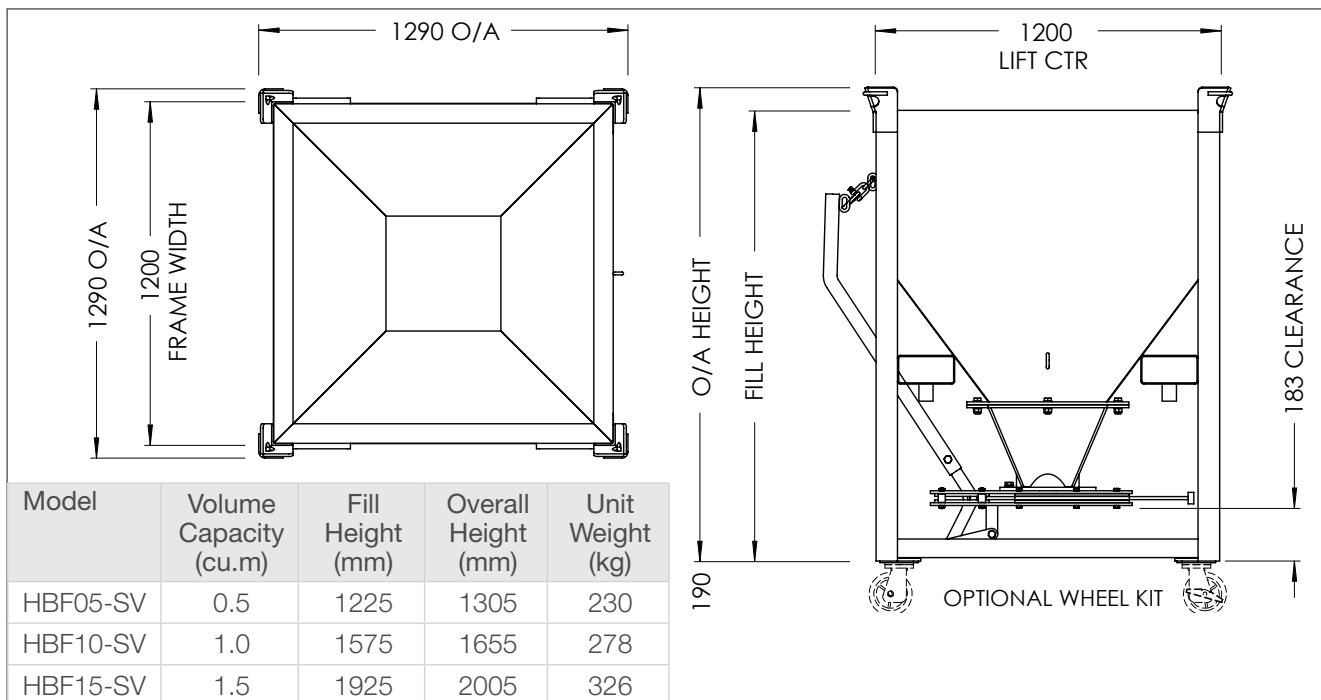

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling PTY LTD *Working with ease*