


CRANE SPREADER BEAM SPECIFICATIONS

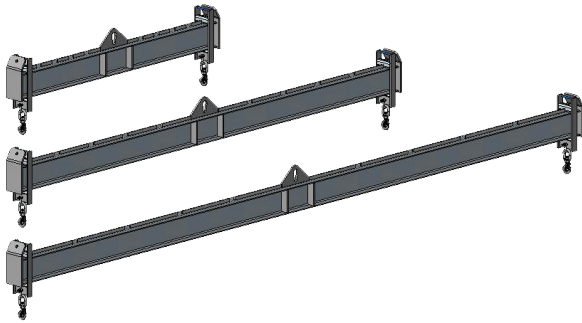

The LCSB Spreader Beams are designed in a range of capacities and lengths to suit any lifting application required by overhead crane.


Features:

- Supplied standard with multiple lifting positions
- Fitted with 2 safety swivel hooks
- Custom lengths and capacity available on request
- Enamel paint finish



MODEL	WLL (T)	'A' (mm)	'B' (mm)	WEIGHT (kg)
LCSB2X1	2000	160	950	31
LCSB2X2	2000	590	2000	70
LCSB3X3	3000	710	3000	110
LCSB5X4	5000	1140	4000	310
LCSB10X4	10,000	1130	4000	565
LCSB10X7	10,000	1730	7000	1500

* WLL based on use as a lifting or spreader beam

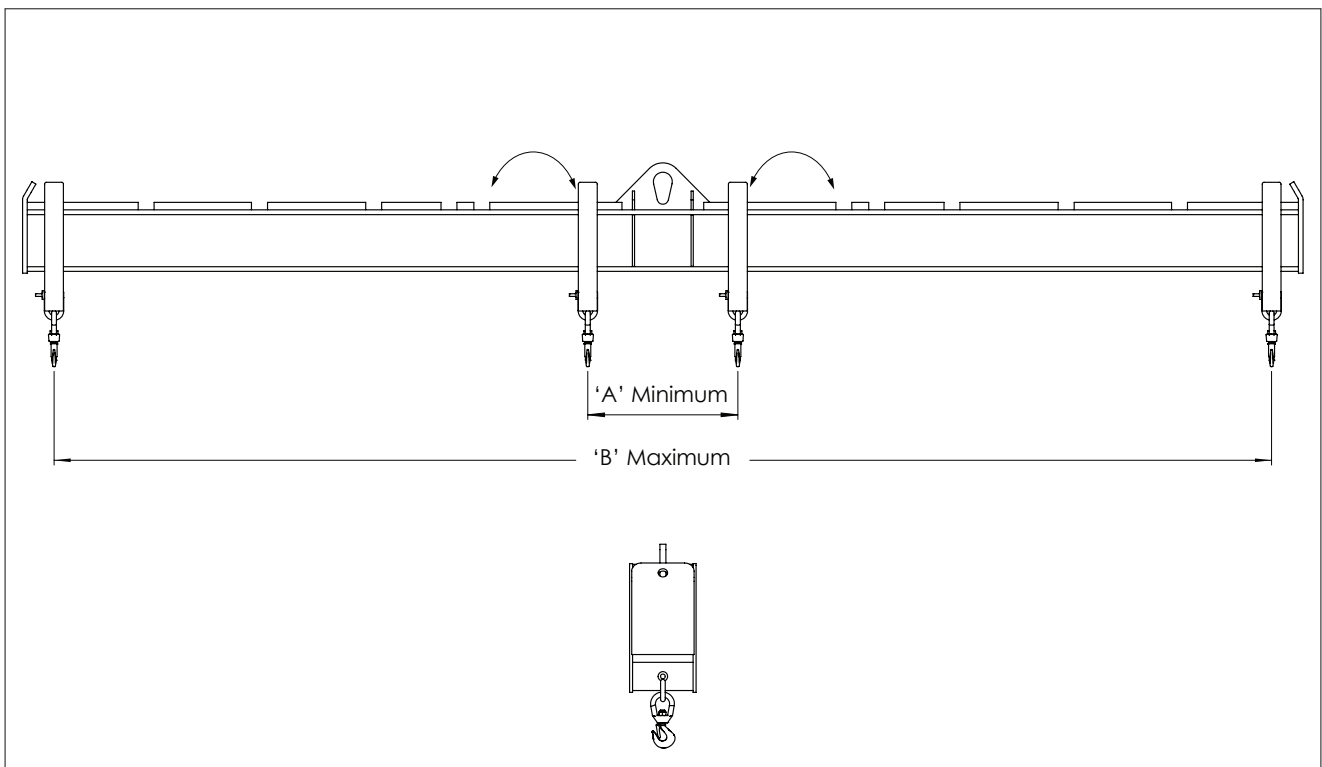

NOTE: Choose the Working Load Limit and beam length to suit your application.

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling PTY LTD *Working with ease*