

# CONTROL HANDLE WITH MAGNET GRIPPER

An end effector that, when integrated in Quick-Lift System, meets the highest standards of ergonomics, working environment, safety and efficiency.

Unique integrated mechanical, electrical, pneumatic swivel enables continuous rotation of the end effector.



Easy to use, thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety is achieved using our intelligent control systems.

High cost efficiency through high reliability and long durability.

A strong solution for quick and easy handling.

The figures are to be seen as indications and will vary depending on lifting objects.

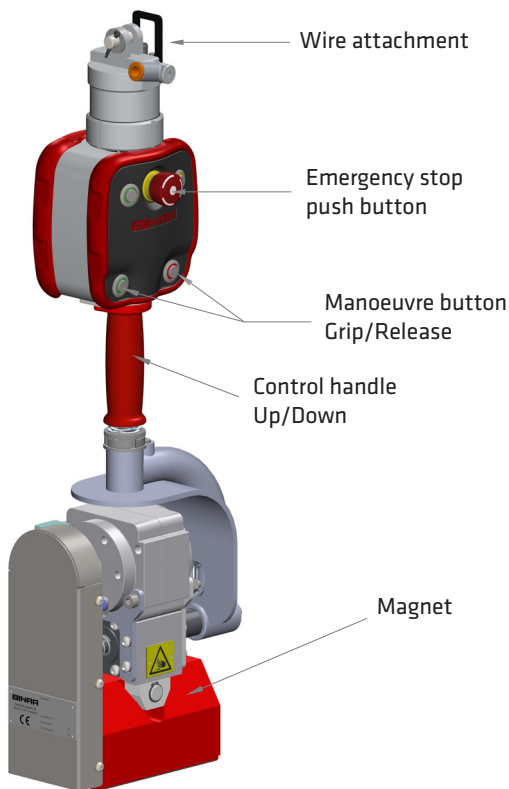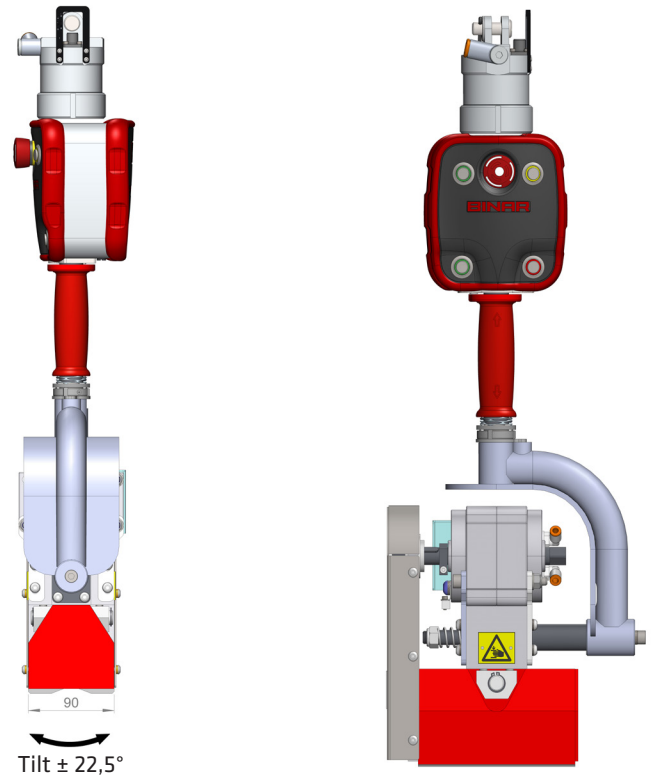

## TECHNICAL DATA

<b>Lifting Capacity</b>	Maximum lifting capacity varies depending on lifting object shape <i>Note: The lifting capacity is reduced if the lifting objects center of gravity is eccentric</i>	
<b>Steel plate</b>	Thickness 25 mm Thickness 20 mm Thickness 15 mm Thickness 10 mm	300 kg 270 kg 210 kg 150 kg <i>Note: For steel plates &lt;25 mm magnetism can occur underneath the plate.</i>
<b>Round steel</b>	ø 60-250 mm, Maximum length 1500 mm Maximum weight 135 kg	
<b>Temperature</b>	Maximum temperature on lifting object 50° C.	
<b>Product weight</b>	21 Kg / 46 lbs	
<b>Air supply</b>	Clean dry air, filtered, pressure 6,0-8,0 Bar	
<b>Safety</b>	3x safety has to be tested on each lifting object.	

Binar Handling AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

**MATERIALS**  
**Handling** PTV LTD *Working with ease-*