

# PEDESTRIAN OPERATED TUG M16 SPECIFICATIONS



4,0 km/h



1.800 kg



6.000 kg

- For loads up to 6000 kg.
- Lifting capacity up to 1800 kg.
- 5-levels speed adjustment.
- Wide range of accessories and connections.
- Adjustable stroke for the lifting arm.
- Ideal for carts with 2 wheels and 2 support legs.


**MATERIALS**  
*Handling* **Working with ease...**  
PTY LTD

👁 **Front View**



👁 **Side View**



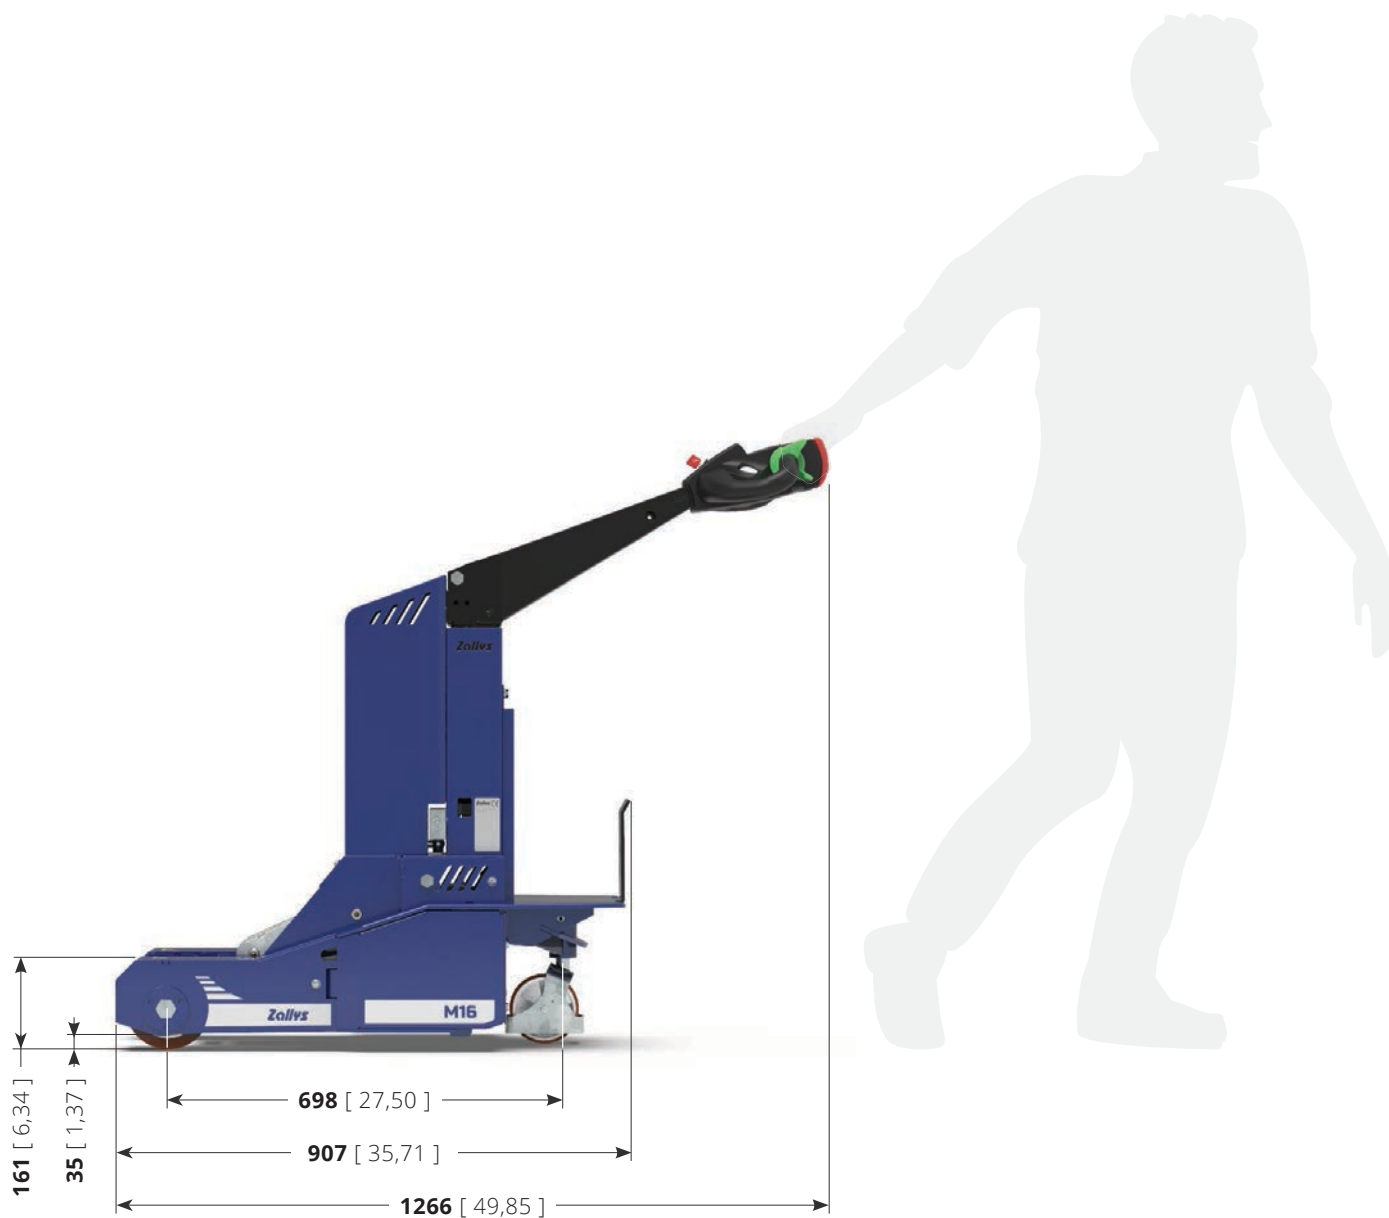

**Zollys®**

TABLE:  
M16

Unit: mm [inch]

## Main sectors



TEXTILE  
INDUSTRY



INDUSTRIAL  
MAINTENANCE




IMETALLURGICAL  
AND TURNING  
INDUSTRY

## Performances on slopes

While the force expressed in N at the hook remains unchanged, the following circumstances **may affect the towing capacity expressed in kg**:

- **type of ground** on which the towing is performed;
- towing on **flat ground or on a slope**;
- use (or not) of **ballasts**;
- **type of wheels** mounted on the vehicle and on the trailer.

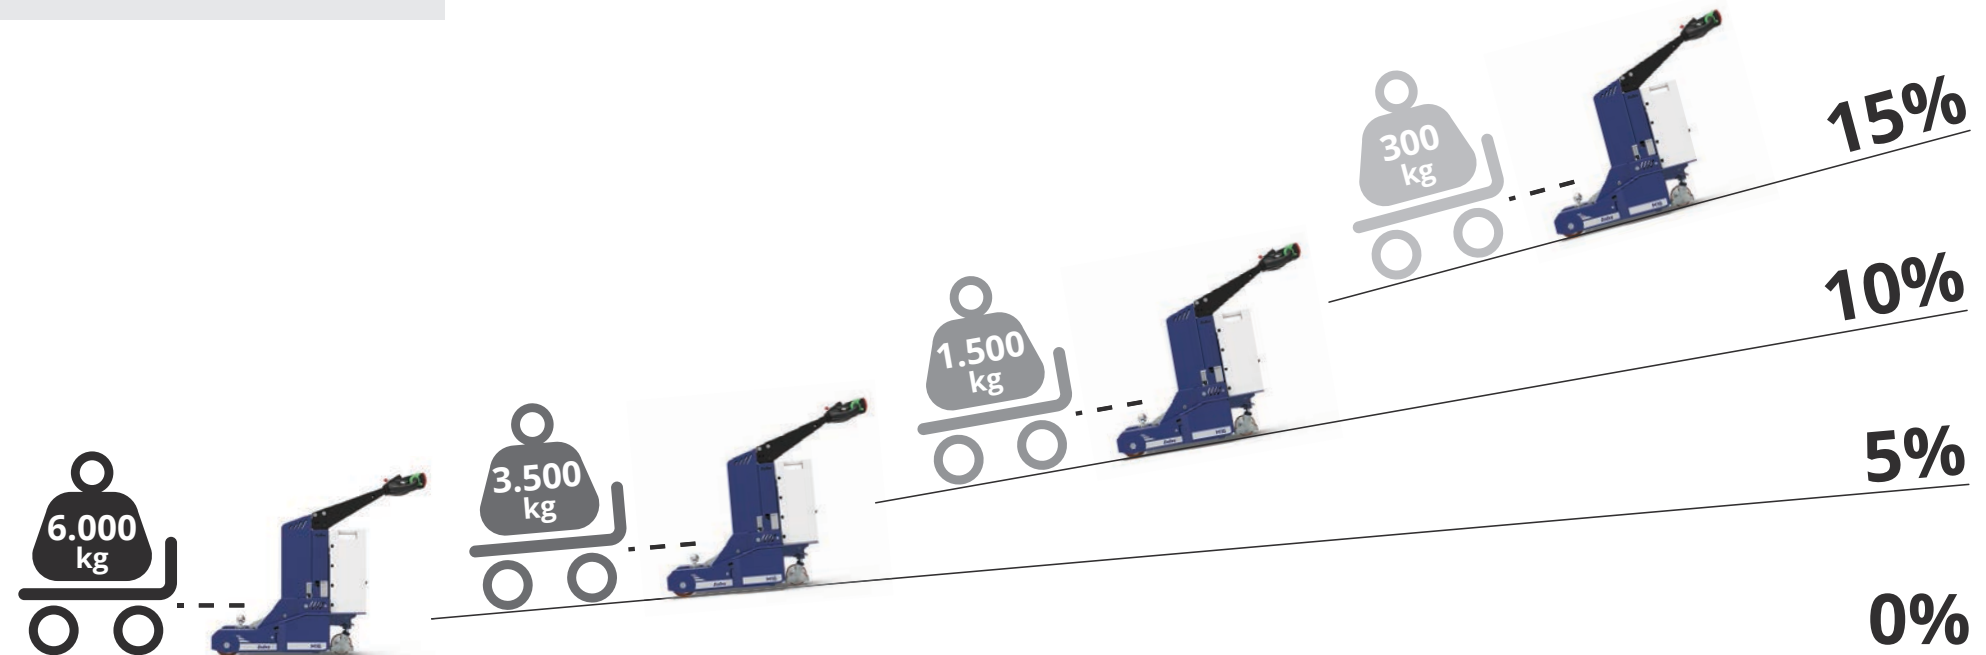

## 5 levels speed adjustment

On the new M4 tillerhead by Zallys a button for the adjustment of the speed of the machine is mounted **as standard**. By clicking it, at each click you switch to the next level. This allows a fast and easy selection of the correct speed based on the kind of manoeuvre. **The Flex-to-Go system** has been studied to give a better maneuverability in confined spaces and more speed on the longer journeys.

Each click adds **20% more speed**.


### Speed ramp:

20% - 40% - 60% - 80% - 100%

Once the maximum speed is reached, by pressing the button again it returns to 20%.




### 5 SPEED CONTROL

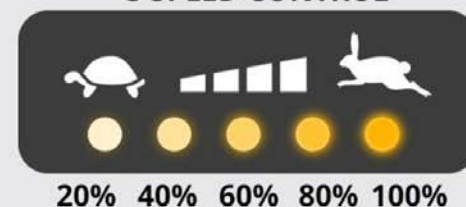

## Ergonomic driving

Zallys' tillerhead has been conceived and produced to make the use of the machine more ergonomic for the operator, guaranteeing the right **comfort while driving during the work shift**. Its **ergonomic design** allows to have **all the driving controls at your fingertips**, the display with the battery charge level and the power key for an easy and fast ignition. The **structure** is made of **resistant materials** in case of accidental bumps.



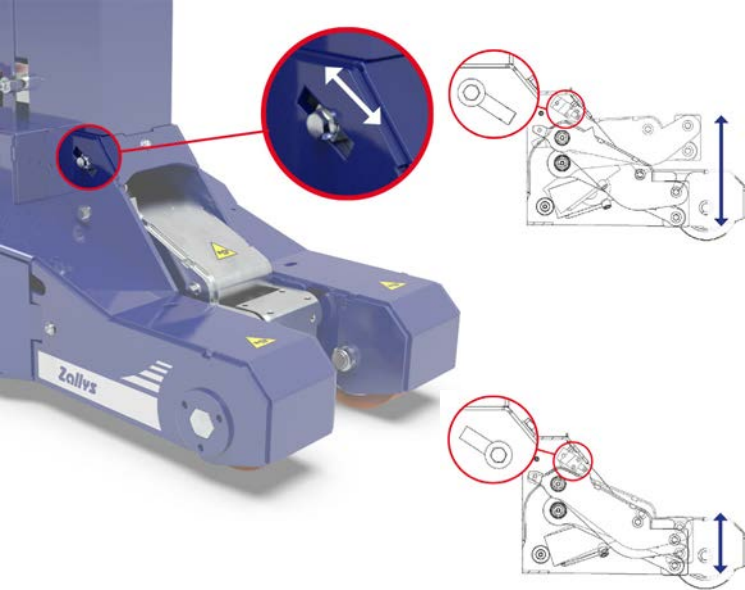

## Hydraulic lifting system with adjustable stroke

**M16** has a powerful hydraulic lifting system, controllable directly from the tillerhead, capable of lifting carts up to 1.800 kg. This feature allows to handle carts with 2 wheels and 2 support legs, such as the carts for fabric reels inside textile industries or the carts for panels. Moreover, thanks to a micro-switch on the side of the machine, it is possible to adjust the maximum stroke of the arm depending on the situation.



45Ah - AGM



40Ah - Litio

## Interchangeable battery packs 24/7

Battery packs are lightweight and easily **interchangeable** in order to cover several work shifts: when one is discharged you can put it in charge and immediately replace it with a fully charged one. This way, the machine is always operating! Moreover, **different amperages** are available according to your needs: 45Ah AGM or 40Ah Lithium.



## Modular ballast system

**Zallys modular system** guarantees **maximum flexibility** on increasing the vehicle's performances. With just **3 kg unit weight**, single ballasts are lightweight and can be equipped **without physical effort by the operator**, while maintaining all their effectiveness.

# STANDARD HITCH

There are several typologies of carts on the market, each one with its peculiar characteristics and features. That's why Zallys makes available on **M16** both standard hitches for the most common trailers and customized solutions for the most specific applications.



**BALL HITCH**



**TOW BALL HITCH**



**TURNING HITCH  
WITH CUSTOMIZABLE  
CONNECTION**



# ACCESSORIES

