> SOCKETS & EXTENSIONS

We manufacture a range of standard sockets, socket extensions and pedestals that are fully compatible with our davit range which can be used for goods lifting, personnel lifting and in many cases fall protection applications. They are also suitable for a variety of structures [subject to engineer approval]. Available in aluminium, galvanised steel and stainless steel. We can also manufacture customised sockets and pedestals on request. Our socket extensions are designed to provide additional height of reach over obstacles, protective rails or walls.



Sockets

Our sockets are fully compatible with our davit range and are suitable for a variety of structures. Available in aluminium, galvanised steel and stainless steel.

We offer sockets with two kingpin diameter sizes [65mm and 95mm] to fit our range of davits.

Our socket options includes:

- > Top Mount
- Side Mount
- Bridge Mount
- > Flush Mount

We can also offer customised sockets, which are bespoke made and developed for non-typical installations.

To discuss your requirements with us, contact us.



Flush Mount

Sockets





Side Mount



Top MountHeight of Lift:
+264mm

Our sockets are part of a fall protection and personnel lifting system, which includes Lifting Davit. Only sockets manufactured by REID Lifting may be used with our Davit's. Failure to use REID sockets will invalidate any product certification and warranty and exposes the user to unnecessary and unwarranted risk. Before fixing always consult a structural engineer to confirm suitability for the loads that will be imposed during use, allowing for the required safety factors.

Pedestals

Our pedestal sockets are similar to top mount sockets and are manufactured from lightweight aluminium. Our pedestals are designed to provide additional lift height or reach over obstacles, protective rails or walls.

We offer pedestals which are suitable for use with our 65mm kingpin davit range.

Our pedestals are available in three standard sizes:

- > 500mm
- > 800mm
- > 1100mm

They can also be customised to meet our customers' specific requirements.

Socket Extensions

Our socket extensions are designed to provide additional lift height or reach over obstacles, protective rails or walls for 65mm socket/kingpin davits. Made from lightweight aluminium alloy, with handles for lifting and carrying, they're designed to be easy to use. Simply insert them into the existing socket and assemble a standard davit, as normal, using the extension as its socket.


Our socket extensions are available in three standard sizes:

- > 500mm
- > 800mm
- > 1100mm

They can also be customised to meet our customers' specific requirements.

*When fixing sockets to structures, customers must always seek the guidance of a suitably qualified engineer to ensure that the structure is able to support the required loads.

** Socket extensions are only suitable to be used with our socket range and cannot be used with a pedestal.

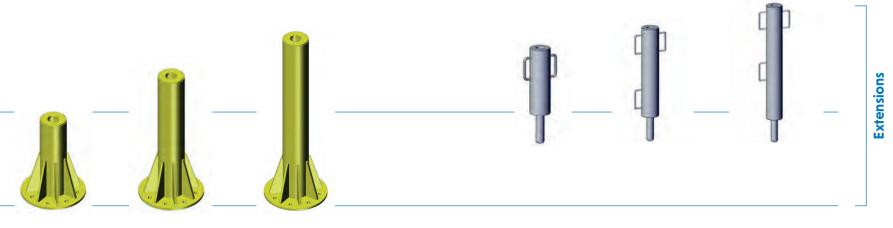

Pedestal

Height of Lift: +500mm

Pedestal

Height of Lift: +800mm

Pedestal

Height of Lift: +1100mm

SE500

Height of Lift: +500mm

SE800

Height of Lift: +800mm

SE1100

Height of Lift: +1100mm

Disclaimer: All REID sockets & extensions have been designed, developed and tested for safe use with REID's equipment and form a key part of the integrity of the total system. Should non-standard third party sockets be used, REID Lifting's Declaration of Conformity & Incorporation on the products is negated. i.e. The system becomes the responsibility of the client.



> Top Mount Socket



- > Suitable for use with our full davit range
- > EN795:2012 certified and meets requirements of IRATA ICOP
- Galvanised Steel Top Mount[STMG0500V2] meets requirements of BS8610:2017
- > Secured using 4nr. M16 anchors [not supplied]
- Suitable for bolting into existing concrete, steel structures or through fixing in other substrates
- Comes complete with cover

| Product Code | Description | Material | Weight [kg] | Diameter [mm] |
|--------------|--|------------------|-------------|---------------|
| STMG0500V2 | Socket Top Mount 65 GMS | Galvanised Steel | 13 | 65 |
| STMS0500V2 | Socket Top Mount 65 316SS | Stainless Steel | 17 | 65 |
| STMA0500 | Socket Top Mount 65 Aluminium Anodised | Aluminium | 9 | 65 |
| STMG1000 | Socket Top Mount 95 GMS | Galvanised Steel | 29 | 95 |
| STMS1000 | Socket Top Mount 95 316SS | Stainless Steel | 30 | 95 |

Bridge Mount Socket



- > Suitable for use with 65mm REID davits
- > EN795:2012 certified and meets requirements of IRATA ICOP
- > Secured using 4nr. M16 anchors [not supplied]
- > Suitable for bolting into steel structures
- Designed to fit open mesh grating or flush with structural steel work

| Product Code | Description | Material | Weight [kg] | Diameter [mm] |
|--------------|---|------------------|-------------|---------------|
| SBMG0500 | Socket Bridge Mount 65 GMS | Galvanised Steel | 19 | 65 |
| SBMS0500 | Socket Bridge Mount 65 316SS | Stainless Steel | 19 | 65 |
| SBMA0500 | Socket Bridge Mount 65 Aluminium Anodised | Aluminium | 7 | 65 |

Side Mount Socket



- > Suitable for use with our full davit range
- > EN795:2012 certified and meets requirements of IRATA ICOP
- Galvanised Steel Side Mount[SSMG0500V2] meets requirements of BS8610:2017
- > Secured using 4nr. M16 anchors [not supplied]
- Suitable for mounting on the side of concrete or steel structures
- > A brace plate can be supplied for thin-walled concrete

| Product Code | Description | Material | Weight [kg] | Diameter [mm] |
|--------------|---|------------------|-------------|---------------|
| SSMG0500V2 | Socket Side Mount 65 GMS | Galvanised Steel | 13 | 65 |
| SSMS0500V2 | Socket Side Mount 65 316SS | Stainless Steel | 17 | 65 |
| SSMA0500 | Socket Side Mount 65 Aluminium Anodised | Aluminium | 6 | 65 |
| SSMG1000 | Socket Side Mount 95 GMS | Galvanised Steel | 30 | 95 |
| SSMS1000 | Socket Side Mount 95 316SS | Stainless Steel | 29 | 95 |

Flush Mount Socket



- > Suitable for use with our full davit range
- > EN795:2012 certified and meets requirements of IRATA ICOP
- > Suitable for resin fixing into existing concrete
- > Complete with cover and re-bars, for casting into concrete

| Product Code | Description | Material | Weight [kg] | Diameter [mm] |
|--------------|--|------------------|-------------|---------------|
| SFMG0500 | Socket Flush Mount 65 GMS | Galvanised Steel | 5 | 65 |
| SFMS0500 | Socket Flush Mount 65 316SS | Stainless Steel | 4 | 65 |
| SFRG0500 | Socket Flush Mount Resin Bond 65 GMS | Galvanised Steel | 5 | 65 |
| SFRS0500 | Socket Flush Mount Resin Bond 65 316SS | Stainless Steel | 4 | 65 |
| SFMG1000 | Socket Flush Mount 95 GMS | Galvanised Steel | 9.5 | 95 |
| SFMS1000 | Socket Flush Mount 95 316SS | Stainless Steel | 9.5 | 95 |
| SFRG1000 | Socket Flush Mount 95 Resin Bond GMS | Galvanised Steel | 9.5 | 95 |
| SFRS1000 | Socket Flush Mount 95 Resin Bond 316SS | Stainless Steel | 9.5 | 95 |

Socket Extensions



- Can be used with 65mm REID davits combined with 65mm fixed sockets
- > EN795:2012 certified up to 1600mm radius
- Integrated carry handles
- Safe use features
- Maintenance free
- Manual handling compliant

| Product Code | Description | Material | Weight [kg] | Height [mm] |
|--------------|-----------------------|-----------|-------------|-------------|
| SE0500-0500 | Socket Extension 500 | Aluminium | 12 | 500 |
| SE0500-0800 | Socket Extension 800 | Aluminium | 15 | 800 |
| SE0500-1100 | Socket Extension 1100 | Aluminium | 17 | 1100 |

Socket Pedestals



- Suitable for use with 65mm davits
- > EN795:2012 Certified up to 1600mm radius
- Secured using 4nr. M16 or M20 anchors [not supplied]
- > Meets requirements of IRATA ICOP up to 1200mm radius
- Safe use features
- Maintenance free
- Manual handling compliant

| Product Code | Description | Material | Weight [kg] | Height [mm] |
|--------------|---------------------------|-----------|-------------|-------------|
| SP0500-0500 | Socket Pedestal 65 500mm | Aluminium | 17 | 500 |
| SP0500-0800 | Socket Pedestal 65 800mm | Aluminium | 19 | 800 |
| SP0500-1100 | Socket Pedestal 65 1100mm | Aluminium | 19 | 1100 |

> PORTABASE Trench Mount Socket



- > EN795:2012 Type B certified
- > Suitable for use with Davits up to a radius of 1200mm
- > Fall arrest capacity 1 user
- > Personnel capacity up to 250kg*
- > Goods capacity up to 500kg*
- > Galvanised steel construction and powder coated finish
- Designed for use in trenching and shoring applications subject to structural validation

*Dependant on Davit Operational Arc [See Assembly & Operation Guide for further information]

| Product Code | Description | Material | Weight [kg] | Diameter [mm] |
|--------------|---|------------------|-------------|---------------|
| PBTM00001 | Porta Base Trench Mount - Max 1200mm Radius | Galvanised Steel | 25 | 65 |



^{*} For detailed product drawings see our socket product overview.