


SPREADER BEAM

CSMP20X6 SPECIFICATIONS

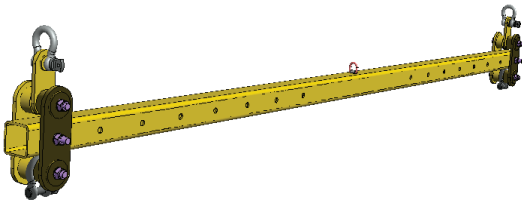


The CSMP20X6 Multi Position Spreader Bar is designed to suit any lifting application required by overhead crane.

Features:

- 20T multi position spreader bar
- 8 lifting positions ranging from 1.5-5.7m lift centres on a 6m length beam
- Also available in 3.3m (CSMP20X3.3) or 8m (CSMP20X8) beam length models
- 48T (CSMP48) and 100T (CSMP100) capacity models also available
- Shackles supplied
- Other lengths and capacities available on request
- Certified to the relevant Australian Standards
- Enamel paint finish



Working Load Limit (WLL)	20,000kg
Beam Length	6000mm
No. of Lift Positions	8
Unit Weight	360kg

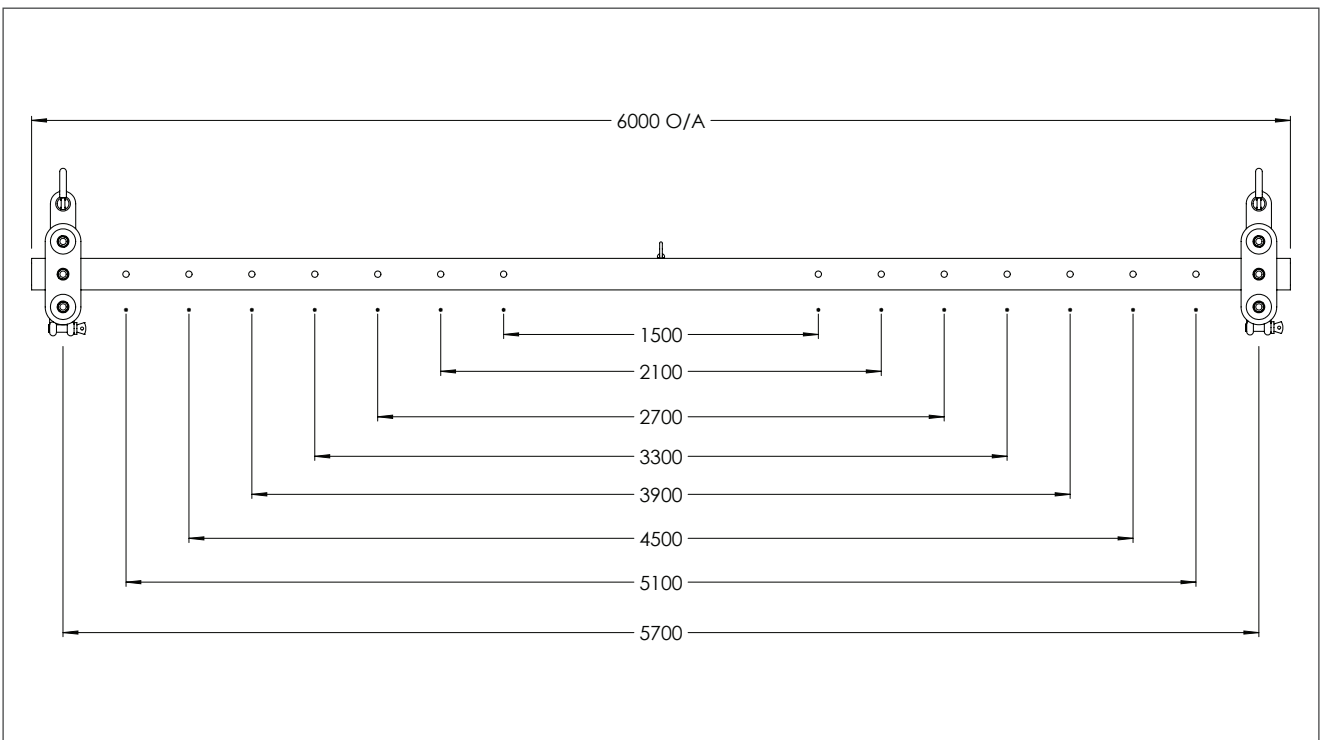

NOTE: The working load limit is calculated on a 60° chain angle setup

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling PTY LTD *Working with ease*