


SPREADER BEAM

CSMP48X6 SPECIFICATIONS

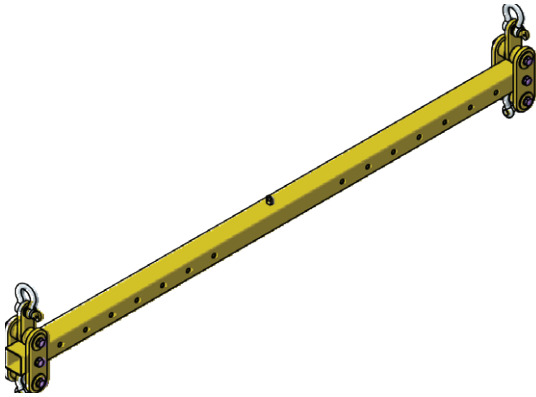


The CSMP48X6 Multi Position Spreader Bar is designed to suit lifting application required by overhead crane.

Features:

- 48T multi position spreader bar
- 8 lifting positions ranging from 1.5-5.7m lift centres on a 6m length beam
- Also available in 3.3m (CSMP48X3.3) or 8m (CSMP48X8) beam length models
- 20T (CSMP20) and 100T (CSMP100) capacity models also available
- Shackles supplied
- Other lengths and capacities available on request
- Certified to relevant Australian Standards
- Enamel paint finish



Working Load Limit (WLL)	48,000kg
Beam Length	6000mm
No. of Lift Positions	8
Unit Weight	658kg

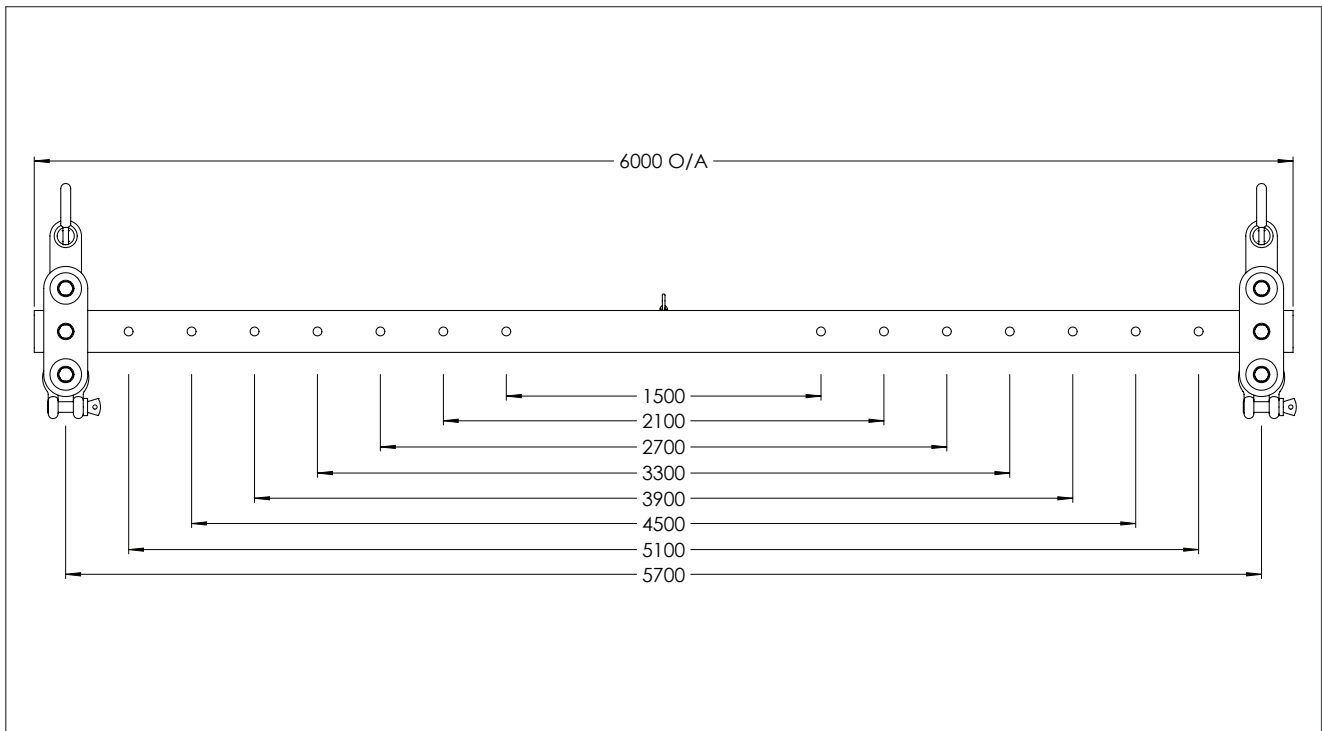

NOTE: The working load limit is calculated on a 60° chain angle setup

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling *Working with ease*
PTY LTD