

SERIES 2400 CONTRACTOR LIFT SPECIFICATIONS

Series 2400 Features:

- ✓ Super Compact 3.7 m and 4.9 m lifts
- ✓ 200 kg lift capacity
- ✓ One piece construction; no loose pieces
- ✓ Easily portable for one person operation
- ✓ Fits most SUVs and vans
- ✓ 4.0 m and 5.2 m heights when forks reversed
- ✓ Suitable for HVAC Contractors, Electrical Contractors, Industrial Maintenance, Steel Erectors and Facility Management



Reversible Forks

Two plunger pins permit quick release of forks. Forks may be removed for storage or reversed for added height.

Inside-Mast Cable Feed

Cable feeds inside mast, removed from the operator for safety – similar to the 2000 and 2100 Series lifts.

Pulley Guards

Contains load cable; line cannot come off.

Handle

Use convenient handle for “hand truck” mobility and to position lift at point of use.

Winch

Coffee grinder style winch features auto-braking and detachable winch handles.

Roller Wheels

Handy wheels located to ease rolling into vehicles for transportation.

8" (20 cm) non-marring wheels




Ideal for Compact Storage

No tools or loose hardware to worry about. Leg lock mechanism releases with plunger pin and slides on base leg. Forks remove and legs reposition to save storage space.



Leg roller allows unit to wheel in stored position.



Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling *Working with ease.*
PTY LTD

A super compact, versatile and cost-effective lifter.

Series 2400 Contractor Lift	M2412		M2416	
Part No.	784750		784751	
Height Max (forks up)	12' 11-3/4"	4.0 m	16' 11-3/8"	5.2 m
Height Max (forks down)	12'	3.7 m	15' 11-5/8"	4.9 m
Lift Capacity	450 lbs	200 kg	450 lbs	200 kg
Height Stowed	62-3/4"	159.4 cm	62-3/4"	159.4 cm
Length Stowed	23"	58.4 cm	23"	58.4 cm
Length Operating	48"	121.9 cm	48"	121.9 cm
Width Stowed	26-3/8"	67.1 cm	26-3/8"	67.1 cm
Width Max	26-3/8"	67.1 cm	55-1/4"	140.3 cm
Winch Cranks per ft/m	8/ft	24/m	8/ft	24/m
Basic Weight	195 lbs	88.5 kg	243 lbs	110.2 kg

With Double Row Casters

Four 3" (7.5 cm) casters permit easy handling of heavy loads. They swivel independently and allow for multi-directional positioning of lifter. The casters are also lockable for safety when the lifter is in use.



Optional Accessories available for Series 2400 Lifts:

Fork Extension (part no. 784695)

With the push of a button, forks may be extended from 59.2 cm to 75.7 cm. When using the fork extensions the weight capacity reduces to 90 kg, as is clearly marked on the extended forks. A second button returns the extension for storage inside forks.





Cable Brake (part no. 784755)

Each mast and carriage can have a factory installed, gravity actuated safety brake, which holds loads in place in the event the cable goes slack.

Tray (part no. 784320)

61 x 71 cm steel tray easily slides onto forks of the lifter.

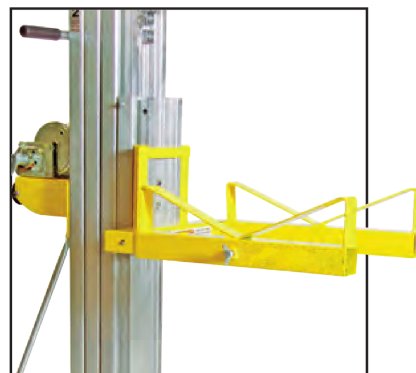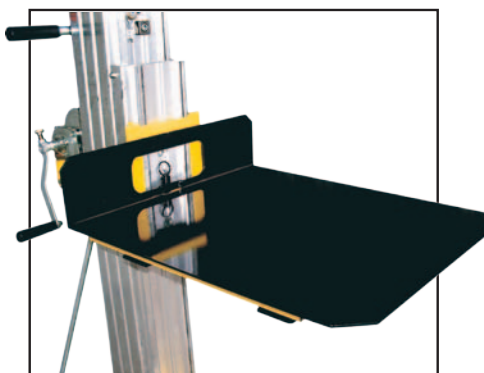

Pipe Cradle (part no. 783705)

Great for air ducts or other HVAC applications. Slides over forks and lifts cylinder shaped items. Packages two per set.