

COUNTERBALANCED MATERIALS LIFTER SERIES 2500 SPECIFICATIONS



A perfect solution for difficult to reach projects. This Lifter reaches extraordinary heights and features an inventive lifting mechanism that allows for close access.

- ✓ No front legs to interfere with lifting.
- ✓ Cart and mast section breakdown for ease of transportation.
- ✓ 300-455 kg lifting capacity.
- ✓ Great for hanging pipe against walls.
- ✓ Four heights (3 - 7 m)
- ✓ 2 Speed Winch.



Works around ground obstructions.



Can reach up to second floor.




Easily fits through doorways.



Great for next to wall applications.

Cart and base can be quickly assembled or disassembled with quick action attaching plunger pins.


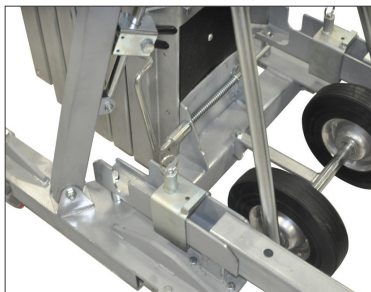


Mast section moves with adjustment steering level. Mast roller wheels help roll mast section into vehicle.

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling *Working with ease.*

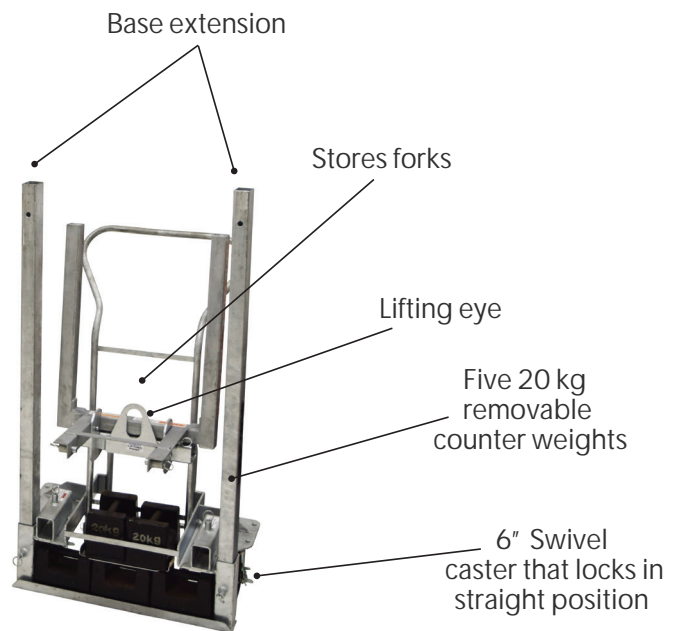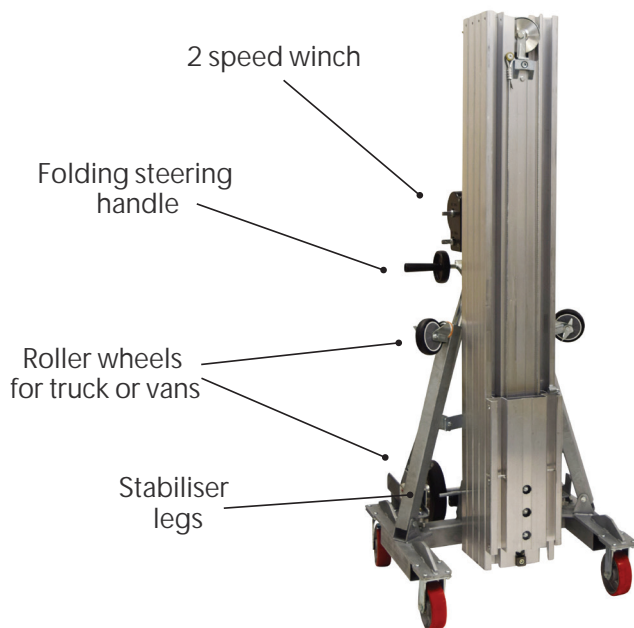

Adjustment base leveling screw to accommodates base extensions on uneven floors.



Pulleys fully enclosed to retain cable.



Mast lifting eye.



Winch operates from side of lift for safety and not between extension legs. Because of hand cart design, moving forks, extensions and weights on the job is simple.

2500 Lift Accessories

Optional Safety Brakes - Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place to help avoid any slack in the cable.

The Pipe Cradle is great for duct pipe or other HVAC applications. Slides over standard forks.

The Boom Carriage works well with glass lifting machinery.



Australia Wide Sales & Service



sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling PTY LTD *Working with ease.*




Product Dimensions

Lift	Part #	Weight		Safety Brake Option
		lb	kg	
M2510	786510	644.0	292.7	783882
M2515	786511	681.0	314.1	783883
M2520	786512	738.0	355.5	783884
M2525	786513	785.0	356.8	783885

Series 2500 Material Lift Dimensions	M2510		M2515		M2520		M2525	
Ground Clearance	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm
Load Height (minimum)	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm
Maximum Height (forks down)	9' 8-1/2"	2.9 m	14' 4"	4.3 m	18' 10"	5.7 m	23' 5-3/8"	7.1 m
Maximum Height (forks up)	11' 8 1/4"	3.6 m	16' 3 1/2"	4.9 m	21'	6.4 m	25' 7-3/8"	7.8 m

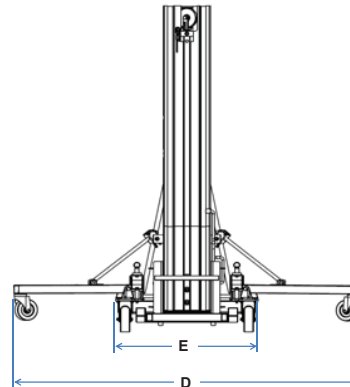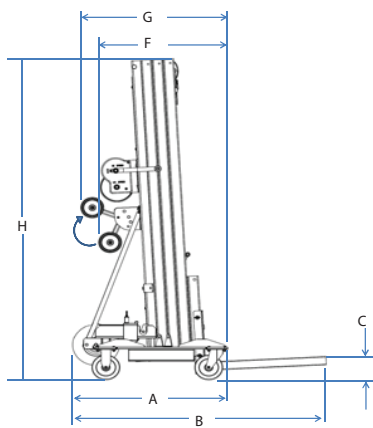

	A		B		C		D		E		F		G		H	
	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
M2510	33.0	83.8	50.5	128.3	5.5	14.0	72.5	184.2	30.0	76.2	46.0	116.8	50.0	127.0	77.75	197.4
M2515	33.0	83.8	53.0	134.6	5.5	14.0	72.5	184.2	30.0	78.7	46.0	116.8	50.0	127.0	77.75	197.4
M2520	33.0	83.8	55.0	141.0	5.5	14.0	72.5	184.2	30.0	81.3	46.0	116.8	50.0	127.0	77.75	197.4
M2525	33.0	83.8	58.0	147.3	5.5	14.0	72.5	184.2	30.0	83.8	46.0	116.8	50.0	127.0	77.75	197.4

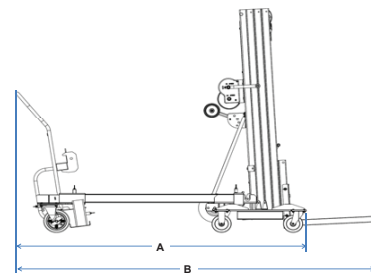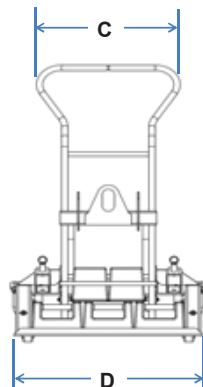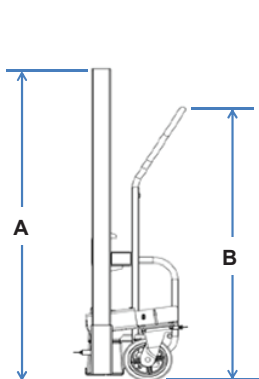

A		B		C		D	
IN	CM	IN	CM	IN	CM	IN	CM
63.0	160.0	49.0	124.5	23.0	58.4	31.5	80.0

	A		B	
	IN	CM	IN	CM
M2510	89.5	227.3	108.5	275.6
M2515	92.0	233.7	110.0	281.9
M2520	94.5	240.0	113.5	288.3
M2525	97.0	264.4	116.0	294.6

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling
PTY LTD *Working with ease*