### TELESTEPS TELESCOPIC LADDERS AND PLATFORMS

### SIMPLE

The telescopic ladder is easy to pull out to the desired length and securing it before use is just as quick. When the red locking catches have unfolded under each rung, this indicates that the ladder is ready for use and can handle loads of up to 150 kg.


### FLEXIBLE

With the telescopic function and the minimal turning radius, the ladders are perfect even in small spaces. The ladders can be adjusted to the optimal height to fit your needs precisely.

### QUALITY, SAFETY & DESIGN

The Prime ladder is perfect for all sorts of professional work. The ladder is small and compact for storage and transportation. The triangular tube design makes the ladder. Rubber tops, angled and grooved steps also mean that you can feel safe at all times.



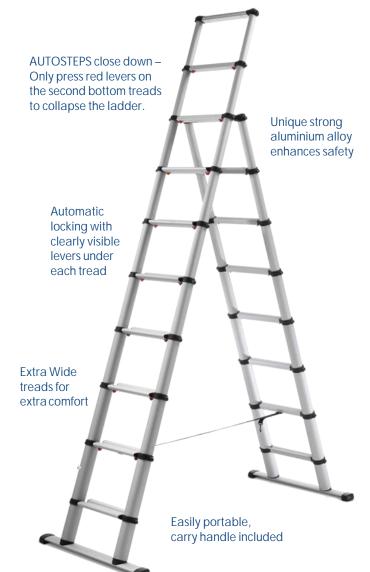



Australia Wide Sales & Service sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

### MATERIALS Handling Working with ease-

# 

# **PRIMELINE**

With Prime, we took everything we know about designing qualitative ladders and embarked on a new era. This is where safety, quality and design meets.

- Innovative triangular design for increased stability and strength
- **Correct leaning angle**
- Angled rubber feet and rubber tops maximise surface grip
- Friction profiles on steps to minimise risk of slipping
- Dirt channels Maximise friction with no dirt between feet and steps
- Minimum turning radius in small spaces
- Simple to transport Fits in all cars
- Simple and safe unlocking
- Always the right height
- Wide safety treads Ergonomic to stand on for long periods of time
- Compact and portable Light but strong
- **Highly recyclable**
- Silicon break technology
- Made of high quality anodised aluminium with glass fibre reinforced plastic fittings
- For professionals by professional

Model	TELEP33	TELEP39
No. of Treads	10	12
Tread Width	50 mm	50 mm
Working Height	4.4 m	5 m
Length Extended	3.3 m	3.9 m
Length Closed	800 mm	870 mm
Width	470 mm	470 mm
Weight	11 kg	13.8 kg

# Image: Constraint of the second stability of ladder with the second sta



When you need to stand on the ladder for longer periods of time, where ergonomic features are of importance for maximum comfort and safety – The Combi ladder is the friend for you! Whether it is height, stability or long days of work – the Combi ladder will not let you down.

- 3 ladders in 1
- The most comfortable ladder on the market
- Wide safety treads Ergonomic to stand on for long periods of time
- Angled rubber feet maximize surface grip
- Friction profiles on steps to minimise risk of slipping
- Dirt channels Maximise friction with no dirt between feet and steps
- Minimum turning radius in small spaces
- Simple and safe unlocking
- Smart accessories for improved use
- Made of high quality anodised aluminium with glass fibre reinforced plastic fittings
- For professionals by professionals

Model	TELEC24	TELEC31
No. of Treads	6 + 2	8+2
Tread Width	90 mm	90 mm
Working Height	3.5 m	4.2 m
Length Extended	2.4 m	3.1 m
Length Closed	710 mm	780 mm
Width	690 mm	770 mm
Weight	14.5 kg	19.5 kg



## **SOLID LINE**

The ideal platform for the person standing within the same space for long periods of time; where you do not want to be stepping up and down the platform just to move a bit to the right or left.



- Stable and sturdy
- Compact and easy to transport with integrated carrying handle
- Telescopic function gives 3 different working heights – 50 cm / 68 cm / 88 cm
- Wide safety treads Ergonomic to stand on for long periods of time
- Friction profiles on steps to minimise risk of slipping
- Dirt channels Maximise friction with no dirt between feet and steps
- Minimum turning radius in small spaces
- Simple and safe unlocking
- Made of high quality anodised aluminium with glass fibre reinforced plastic fittings
- For professionals by professionals



Model	TELESOLID
No. of Treads	3
Tread Width	650 mm
Working Height	2.3 / 2.1 / 2.6 m
Length Extended	880 mm
Length Closed	740 x 280 x 620 mm
Width	620 mm
Weight	16.5 kg

MATERIA

Handling Working with ease