

# HARNESS CONFIGURATIONS

## HR002 Fall arrest harness - standard

General purpose harness with front and back attachment points.

Size	M-XL	XXL
Weight (g)	1150	1200



Rated to 136kg



## HR003 Fall arrest harness - premium

General purpose harness with front and back attachment points and quick connect buckles.

Size	M-XL	XXL
Weight (g)	1150	1200



Rated to 136kg




## HR004 Fall arrest harness - deluxe

Multi-purpose use harness with front and rear attachment points, breathable rear mesh panel, quick connect buckles and extra wide, padded leg straps.

Size	M-XL	XXL
Weight (g)	1715	1765



Rated to 136kg

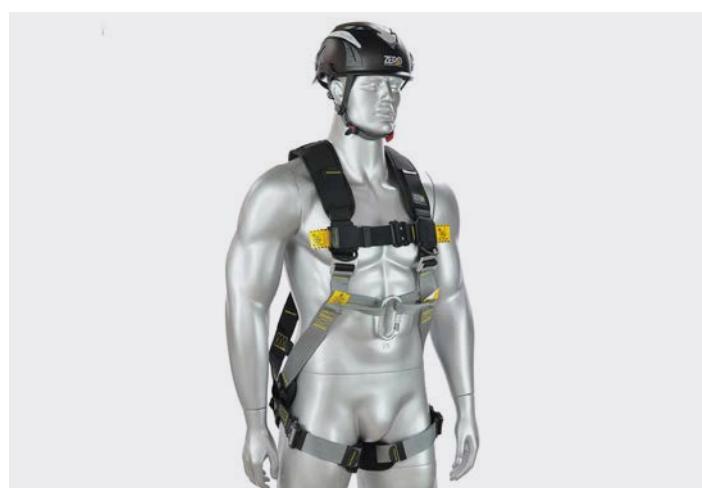

**HR005 Fall arrest harness with 2.0m lanyard**

General purpose harness with front and rear D attachment points and energy absorbing lanyard with a snap hook connected to the rear dorsal.

Size	M-XL	XXL
Weight (g)	1460	1600



Rated to  
136kg



# ROPE LINES & LANYARDS

**HR010** Kernmantle rope line with length adjuster

Available in 15.0m, 20.0m and 30.0m lengths.



**HR021** Energy absorbing snap hook lanyard

2.0m in length.



**HR023** Adjustable webbing lanyard with snap hooks

0.8m - 2.0m in length.



**HR020** Energy absorbing lanyard with carabiners

0.7kg




**HR022** Energy absorbing scaffold hook lanyard

2.0m in length.



**HR024** Energy absorbing lanyard with double scaffold hooks

2.0m in length.

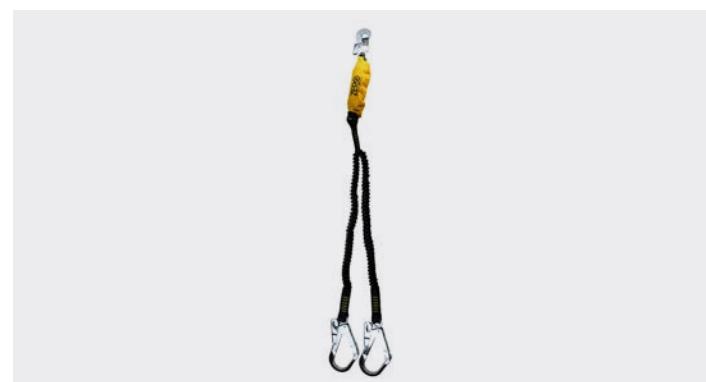

---

**HR025 Retractable webbing lanyard with snap hook - 2.0m**

2.4m in length, 1.25kg in weight. Rated to 140kg.



---

**HR029 Webbing anchor strap**



---


**HR026 Retractable wire rope lanyard with snap hook**

Available in 6.0m, 10.0m and 15.0m. Rated to 140kg.



# HARNESS ACCESSORIES

HR040 Multipurpose roofers harness kit

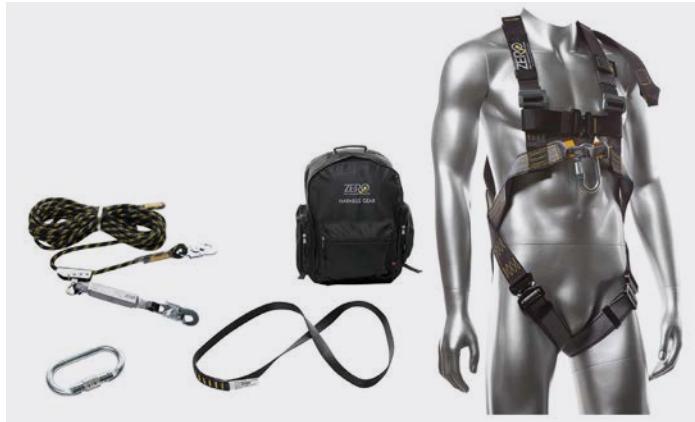

HR030T Carabiner - 22kN



HR031 Carabiner - 45kN



HR032 Quick link screw-gate - 8mm



HR038 Temporary webbing static line



HR047 Suspension trauma strap - pair



HR048 Lockable equipment



HR049 Harness gear backpack



# TECHNICAL SPECIFICATION

## **Harness gear**

Kattsafe harness gear and equipment for personell working at heights. System design, supply, layout, installation and certification by a Kattsafe approved installer, as per the manufacturer's installation instructions and current standards.

## **Materials**

- Harness: Polyester webbing
- Ropeline: Nylon, 11mm kernmantle rope
- Energy absorber: Polyester
- Carabiners: Alloy steel

## **Weight**

- Harness: 1.3kg (includes all buckles and D-rings)
- Ropeline: 15m – 2.2kg
- Energy absorber: 0.7kg (includes end carabiners)
- Carabiners: 0.6kg

## **Working load limit**

- All fall arrest harness gear is rated at 100kg and is designed for a maximum free fall of 2000mm. An energy absorber is to be Incorporated as a safety factor whenever a fall arrest situation is encountered.
- Harness load rating: 136kg (for use with standard fall arrest lanyard)
- Ropeline load rating: 1 person
- Energy absorber load rating: 200kg commencement deployment load.
- Carabiner load rating: 23kN

## **Compliance**

Kattsafe harness gear and equipment is designed and manufactured in accordance with requirements of Australian Standards AS/NZS 1891.1 and relevant statutory OHS codes of practice guidelines.

## **Testing**

Testing and performance is based on requirements of Australian Standards AS/NZS 1891.1 with NATA certification.

## **Product warranty**

1 year from date of purchase subject to correct use and maintenance in accordance with manufacturer's specifications and recommendations. Lifespan of 10 years from date of manufacture.

## **Inspection and maintenance**

Inspection and certification required every 6 months by a competent height safety equipment inspector in accordance with manufacturers specifications and requirements of Australian standards AS/NZS 1891.1)

## **Important note**

Failure to supply and/or install proprietary product in accordance with above standards and codes, specifications and instructions voids complete system certification and/or warranty.