

ELECTRIC STAIR CLIMBER CT420



Adjustable Handle

Rotate to Adjust Handler Angle



Belt Fixed Mobile Beam

Used For Fastening The Belt and The Height is Adjustable



Loading Plate

Adjust The Loading Angle Automatically and Secure the Cargo In Balance



Loading Up to 420KG
On Flat Surface And Stairs



Manoeuvring In
Narrow Space


Joystick Controller

One Finger Control From One Mode to Another
With Specific Wire Control



Vertical Beam

Telescopic Adjustment
Of The Vertical Beam
Height



Vertical Beam Adjustment String


Drag The String to Adjust The
Vertical Beam Height

Battery Pack

Play & Plug With Auto Connection,
Independent Switch,
Display Battery Level and Voltage

Universal Wheel

Easy to Push and Manoeuvre

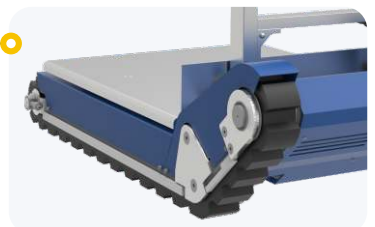

Crawler Track

Independent, Non-slipping &
Non-marking

ALL IN ONE WIRE CONTROLLER



Function Display Screen

Multi-functional

Omnidirectional Joystick

Functional Buttons Instruction



Power Switch



Speed Plus



Speed Reduction



Speaker



Turn left



Turn right



Loading Board Manual Adjust




Loading Board Auto Adjust

ELECTRIC STAIR CLIMBER CT420

TECHNICAL PARAMETER

Model	CT420
Maximum Capacity	420KG
Item Weight	94KG
Battery Capacity	1400-1600 Steps (78~100 Floors)
Upstairs Speed	10~13 Steps/Min
Downstairs Speed	13~16 Steps/Min
Motor	DC Motor 24V 200W*2
Noise	<70dB
Protection Grade	IP54
Step Requirement	Height<21CM
Minimum Platform Size	1500x1500MM (Stairs Corner)

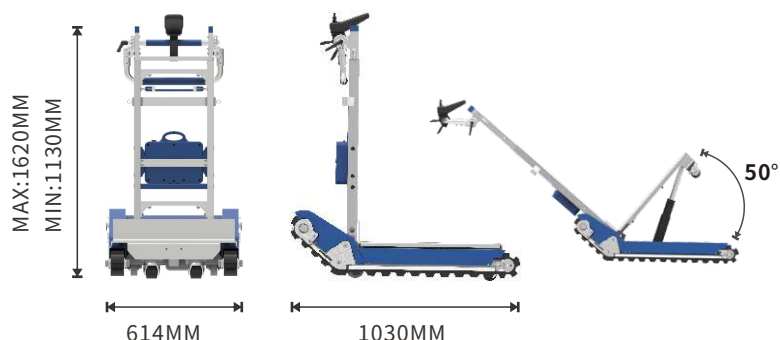

ACCESSORIES



Battery Pack

Parameters: 25.9V 17.5AH

Weight: 3.1KG



Charger

Input: AC100-240V

Output: DC29.4V 4A



Adjustable Safe Belt

Length: 6000MM

Width: 55MM



**Height Adjustable
Mobile Beam**

Adjustable Installation Height

OPTIONAL FIXTURE



Ramp ZX400

Size: 1050x687x633MM

Load Capacity: 520KG

Net Weight: 19.6KG

Rise of LoadingBoard: 600-800MM



Photocopier Delivery CT420.AE/P

Load Capacity: 250KG

Net Weight: 14KG

Applicable Cargo Size: >750MMx750MM

Minimum Ground Clearance: >12MM



Electric Mini Lift ELS420

Load Capacity: 420KG

Net Weight: 18KG

Minimum Cargo Width: >790MM

Rminimum Ground Clearance: >12MM