

WHEEL CHOCKS SPECIFICATIONS

Product Description

Heavy Duty Plastic Wheel Chocks are available in a standard colour of yellow with other colours on request. Traction Pads are essential to the safe usage of our chock range and are included on each chock. OZ CHOCKS are designed to fit a wide range of tyre sizes.

OZ CHOCK Composition


OZ CHOCKS are manufactured from polyethylene and high density urethane foam. All materials used in the construction of the chocks are 100% virgin materials.

OZ CHOCK Standards

OZ CHOCKS are manufactured to comply with SAE-J348 standards.

OZ CHOK Recommendations

- Always use an adequate number of chocks as per your risk assessment.
- Always place chocks on solid surface with vehicle stopped / park brake on.
- Always place chocks squarely against the centre of the tyre.
- Always choose correct chock size for tyre diameter.
- Use contradictory to instructions may cause product failure / personal injury.
- NEVER use damaged chocks.
- NEVER drive over a chock.


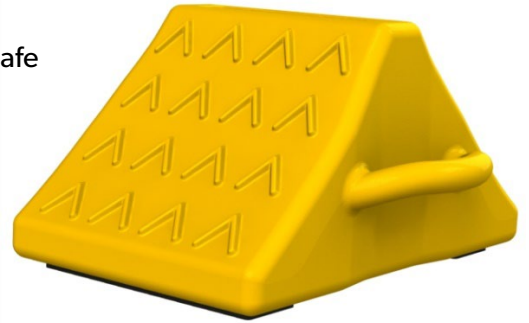


Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling *Working with ease.*
PTY LTD

WHEEL CHOCKS SPECIFICATIONS


	Product	Size	Weight	Suit Wheel Diameters
	OZ CHOCK 035	250L x 120W x 145H	0.9kg	160mm 635mm
	OZ CHOCK 050	284L x 210W x 166H	2.6kg	160mm 635mm 800mm
	OZ CHOCK 055	302L x 210W x 161H	2kg	160mm 635mm 800mm
	OZ CHOCK 065	426L x 279W x 220H	4kg	1300mm
	OZ CHOCK 075	490L x 399W x 266H	8kg	1000mm 1300mm
	OZ CHOCK 105	595L x 380W x 279H	16kg	2200mm
	OZ CHOCK 155	700L x 415W x 493H	18kg	2700mm 4000mm

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling PTY LTD *Working with ease*

WHEEL CHOCKS SPECIFICATIONS

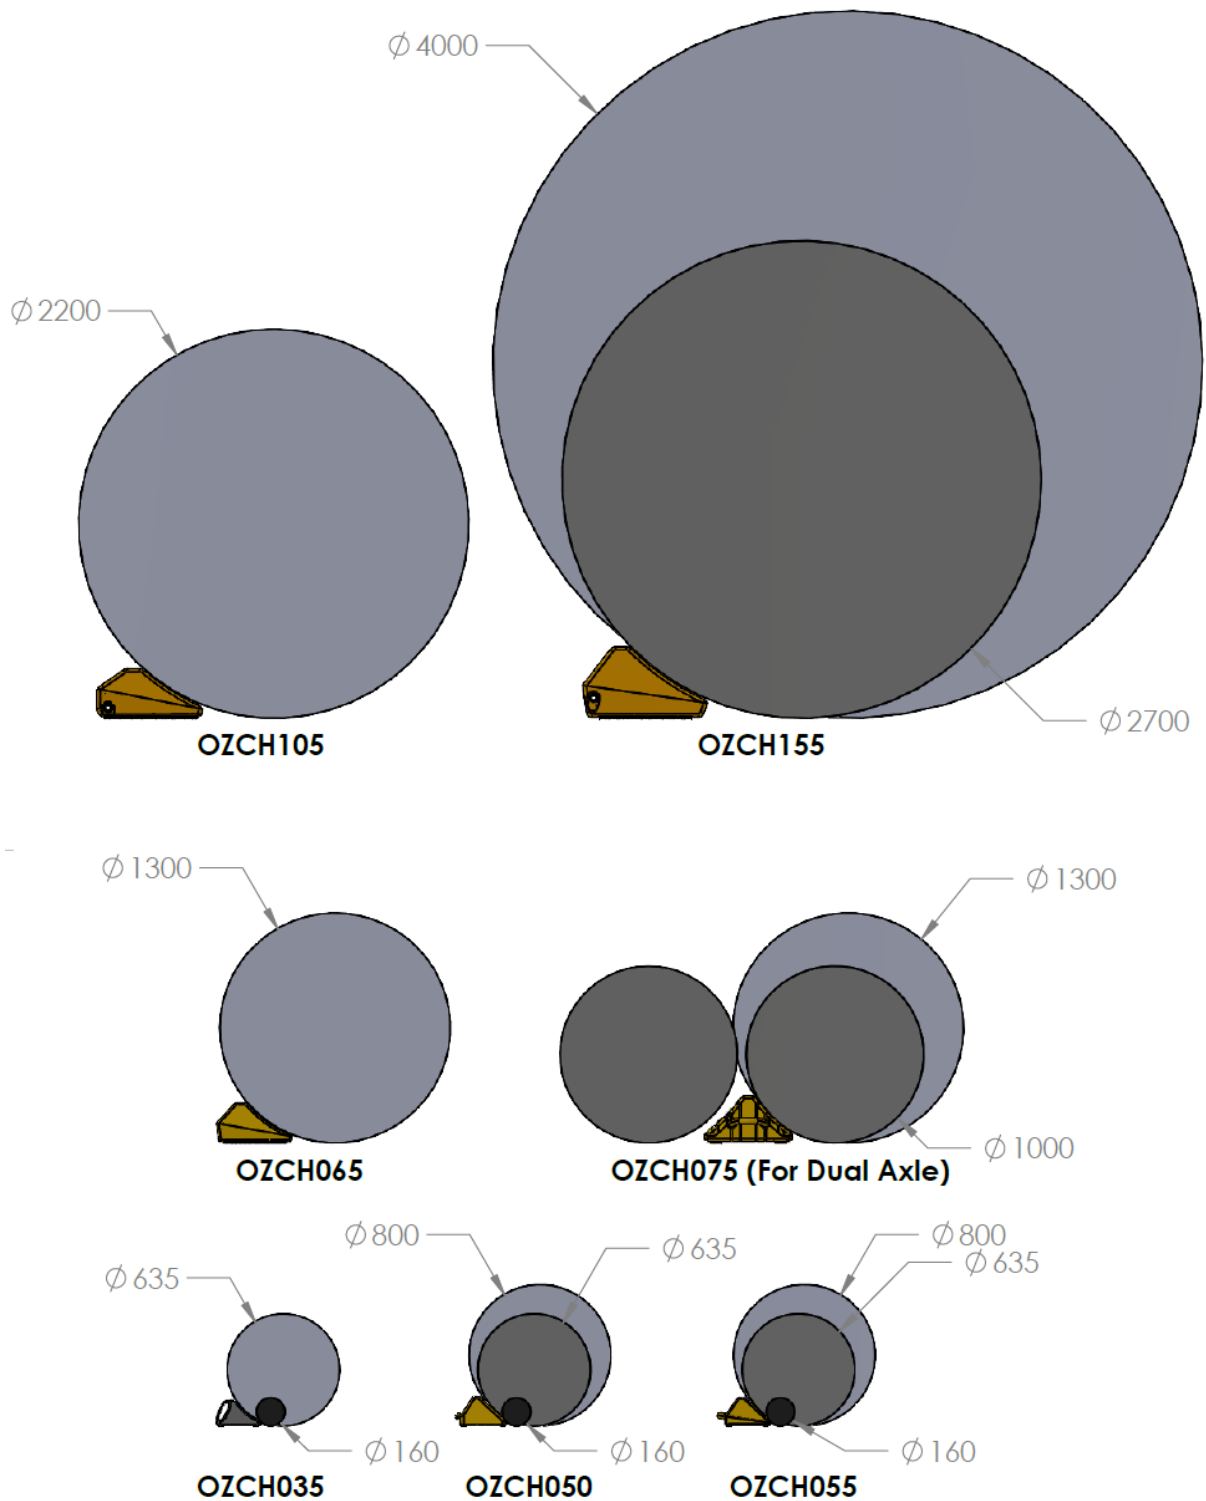

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS
Handling PTY LTD *Working with ease*